

INSTALLATION INSTRUCTIONS

Product 7160-0598 - OVERHEAD GUARD MOUNT, EXTENSION SLEEVE **Revision** REV. A


Form **INST-667**

Printing Spec: PS-001

The following instruction sheet is for the part number listed above. This mount is designed to attach to the 7160-0368 overhead guard mount with clam shell and the 7160-0369 overhead guard mount with clevis.

The extension sleeve attaches to the overhead guard mounts using 3/8" dia hex head bolts. The sleeve extends the current 8" drop to an adjustable 12"-16" drop.

To attach the extension sleeve to the overhead guard mount begin by removing the clam shell/clevis. Using the 3/8" hex head bolts, attach the extension sleeve to the overhead guard mount, and attach the clam shell/clevis to the bottom of the extension sleeve. Note the proper mounting bolt pattern between the 12"-15" configuration and the 16" configuration.

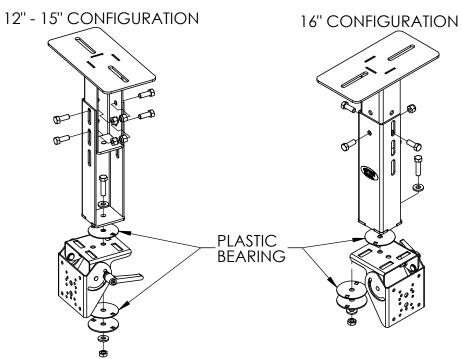

Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© copyright 2011 Gamber-Johnson, LLC