

INSTALLATION INSTRUCTIONS

Product 7160-0126

Revision

Form


Rev.A

NST-388

PENTAX PRINTER MOUNT P.J-673 WIRELESS PRINTER **Printing Spec:** PS-001

Mounting the Pentax Printer Mount to a Gamber-Johnson DS-74 mounting bracket:

- 1. Attach the printer mount to a DS-74 with the #10-32unc x 3/8" long screws and split lock washers provided in hardware bag 7120-0427. There are multiple hole locations on the bottom of the printer mount and in the DS-74 mounting bracket, so use the holes that will best locate the printer mount for your specific application.
- 2. The printer mount comes with a cable strain relief bracket located in the hardware bag. If your specific application has room to mount the strain relief bracket, you can do so with the #6-32unc x 1/4" nylon patch screws found in the hardware bag.

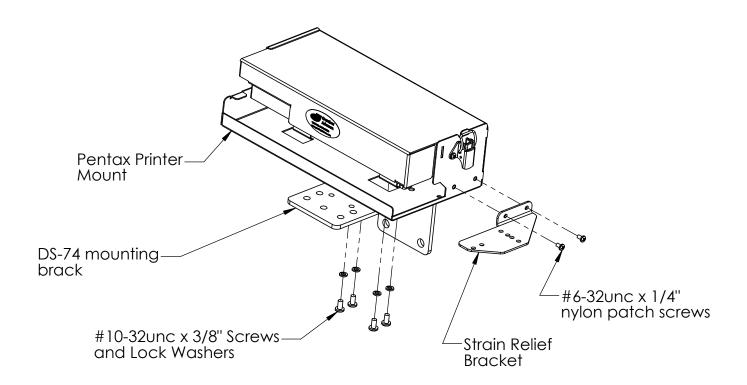

Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.