



INSTALLATION INSTRUCTIONS

Product**7160-0901****PANASONIC FZ-F1/N1 CRADLE****Revision**

Rev. C

Form

INST-754


Printing Spec: PS-004

This instruction sheet is for the Panasonic FZ-F1/N1 cradle only. For instructions on features, set-up, and operation of the computer, please refer to the manual provided by Panasonic with the computer.

This docking station is designed to be used with a variety of Gamber-Johnson mounting systems. Installation instructions for other Gamber-Johnson products are provided with each individual product.

This instruction sheet is for the following products:

Item No. 7160-0901-00(-P)(-E) No RF

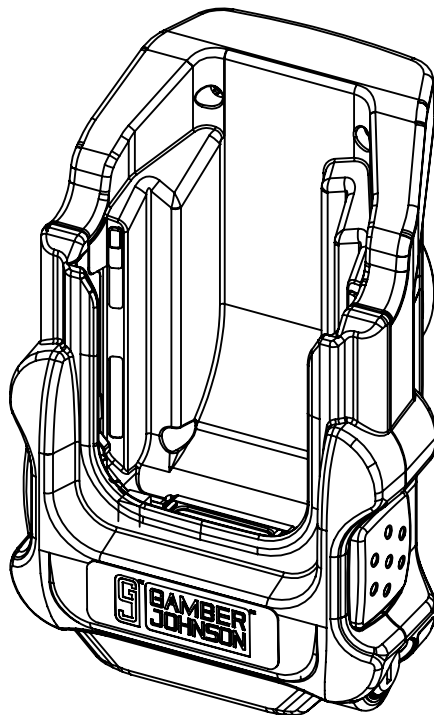
**Product Mounting Disclaimer**

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.


© Copyright 2017 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868


PANASONIC F1/N1 CRADLE FEATURE IDENTIFICATION

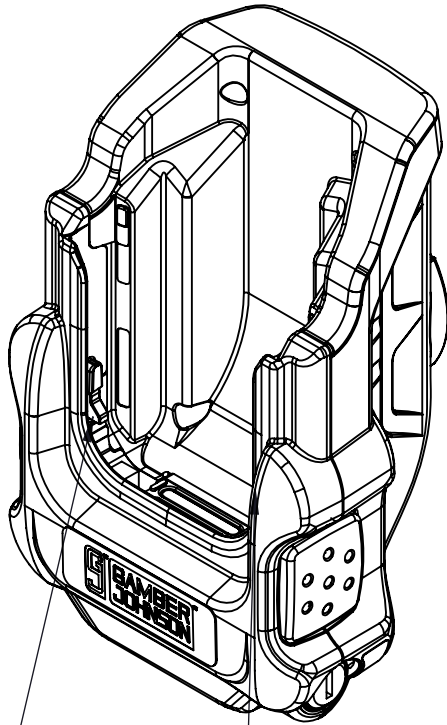

Latches 2X

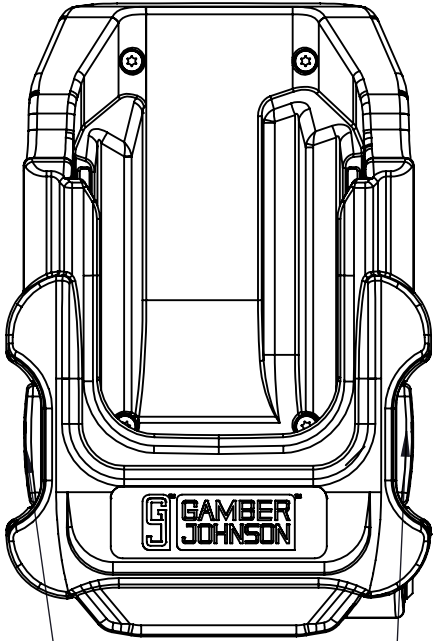

RELEASE BUTTONS 2X

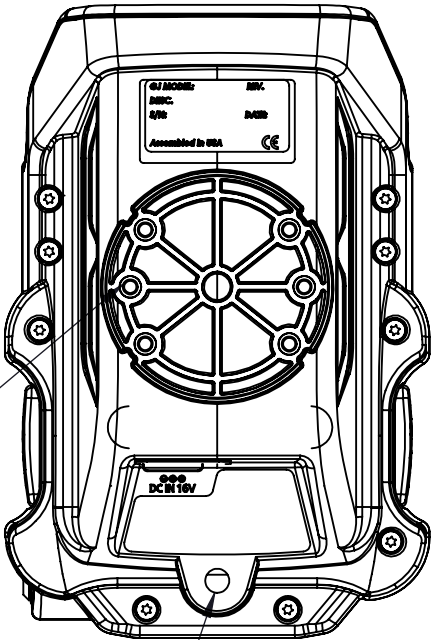


AMP Mounting Pattern
38mm x 30mm

Cable Tie Slots


DOCKING AND UNDOCKING THE COMPUTER

How to use

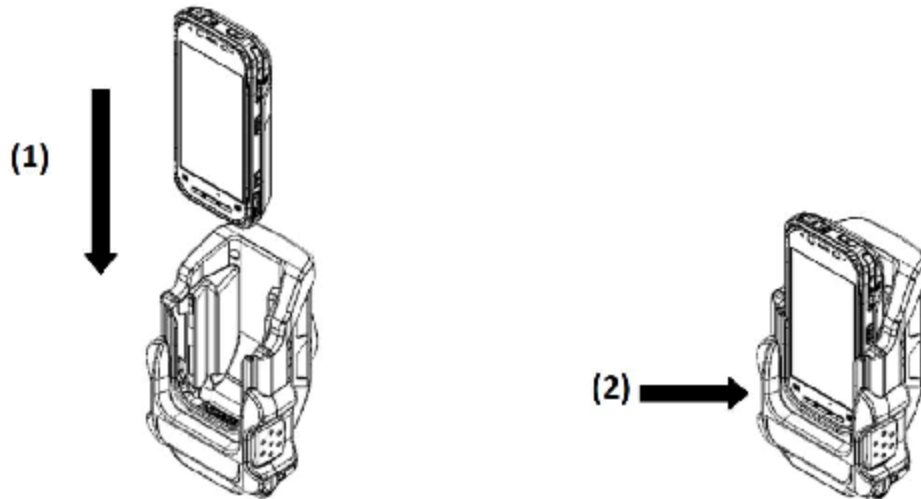

DOCKING PROCEDURE

1. Insert FZ-F1/FZ-N1 into the vehicle mounter as shown.
2. Ensure the bottom of the FZ-F1/FZ-N1 is located in the vehicle mounter

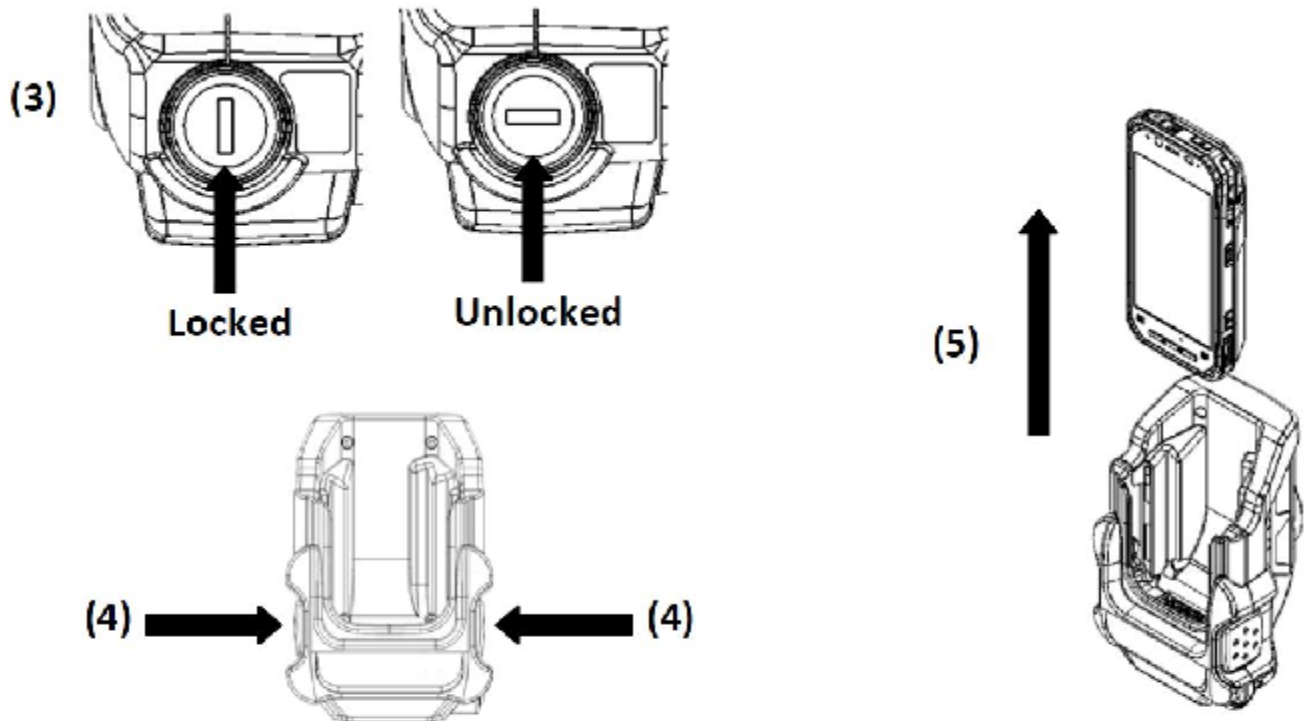

UNDOCKING PROCEDURE

3. Ensure the lock is in the unlocked position.
4. Push the release button.
5. Remove the FZ-F1/FZ-N1 from Dock