



INSTALLATION INSTRUCTIONS

Product
7160-1046

Revision
Rev.A


Form
INST-811

Ford F150 Transmission Hump Vehicle Base

Printing Spec:PS-001

This instruction sheet is for the installation of the Ford F150 Transmission hump vehicle base.

Note: If the unit is being mounted in a vehicle with a 4 Wheel drive shift lever mounted on the transmission hump, then the Support Leg must be removed prior to installation of the mount.

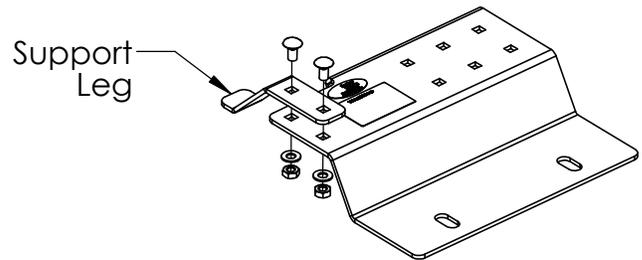

Step 1. Remove the passenger seat.

Step 2. Remove the center seat. There are 5 bolts that hold the center seat in place. 3 on the passenger side and 2 on the drivers side.




Step 3. Remove the center seat mounting bracket from the floor.

Step 4. Attach the pole to the mount using the hardware supplied with the pole.

Center seat front mounting bracket

Step 5. Reattach the center seat bracket, with the transmission hump vehicle base between the bracket and the floor.

Transmission Hump Vehicle Base

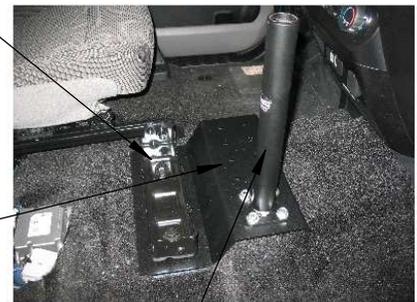

DS-Lower Pole

Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2017 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

Step 6. Re-install the center and passenger seats.



Note: Gamber-Johnson has included a bracket for attaching a Support Brace (GJ# 7160-0230).



Lower Trim Panel

Attaching the support brace:

Step 1. Remove the lower trim panel. There is a screw on the drivers side and spring clips that hold it in place.

Step 2. Remove the (2) mounting screws on the passenger side and reattach with the support bracket mounted in place.

Step 3. Re-attach the lower trim panel.


Step 4. Attach the 7160-0230 support brace to the pole and the support bracket with the hardware supplied in hardware bag 7120-0802.



Mounting
Screws



Support Bracket

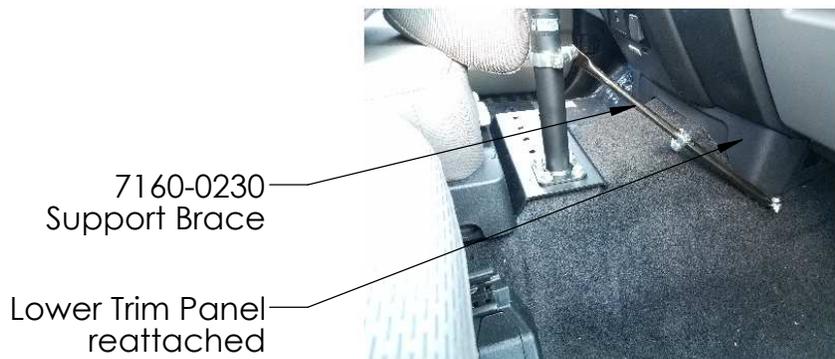

7160-0230
Support Brace

Lower Trim Panel
reattached



WARNING



- You must read and follow all of these installation instructions. Failure to follow all of these installation instructions may result in serious bodily injury or death.
- Keep these installation instructions with the product and readily available in the vehicle for future reference of other users of the product.
- Additional copies of the installation instructions can be obtained from Gamber Johnson.
- If you need assistance or have any questions, call Gamber-Johnson at 1-800-456-6868.
- Do not remove warning label from product under any circumstances.
- Before installation of any equipment always check area for routing of wires / cables and if drilling is required check area where drilling above and below the drilling area.
- High speed vehicle turns may cause a motion attachment product to swivel, interfering with the driver or other equipment.
- The Vehicle Base, Upper Pole, Motion Attachment and Dock or Cradle should not be positioned in the area where the airbag will be deployed if it is activated. DO NOT position the equipment in front of an airbag. Equipment positioned in front of an airbag can cause serious injury or death if and airbag was activated, such as in an accident.
- The installer and user of this product(s) are responsible for installing and using Upper Pole, Motion Attachment and Dock or Cradle assemblies outside the airbag deployment zone. (See Product Mounting Disclaimer Below)
- If installation of the equipment requires that the equipment be placed in front of an airbag, deactivate the airbag in the vehicle so it cannot be activated in an accident. In order to secure permission for deactivating the airbag in these circumstances, contact the National Highway Traffic Safety Administration at 1-800-424-9393 to gain permission to do so. If you have any questions or need assistance, call Gamber Johnson at 1-800-456-6868.