



# INSTALLATION INSTRUCTIONS

**Product**  
**7160-1111**

**Revision**  
Rev.A

**Form**  
INST-828

**TABLET DOCK SCREEN BLANKING MOUNT**

**Printing Spec:PS-001**

This instruction sheet is for mounting the 7160-1111 (tablet dock screen blanking mount) to the back side of a Gamber-Johnson docking station. This mount will fit on a Dell Latitude 12 Rugged tablet dock or a Panasonic G1 tablet dock. The mount is attached between the dock and the motion attachment using the dock hardware.

1. Plug the screen blanking USB cable into the USB port on the back of the dock and cable tie in place.
2. Place the screen blanking mount over the mounting studs on the back of the dock and attach the motion attachment to hold it in place. See Figure 1.
3. Note: If a keyboard mount is being used the keyboard mount will be installed between the dock and screen blanking mount. See Figure 2.

Figure 1


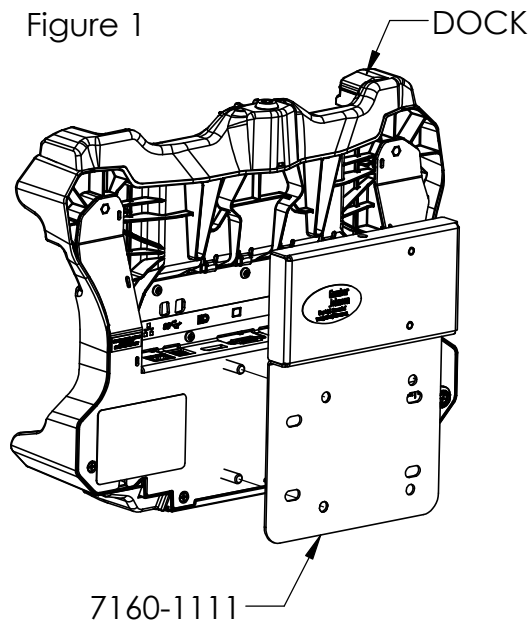


Figure 2

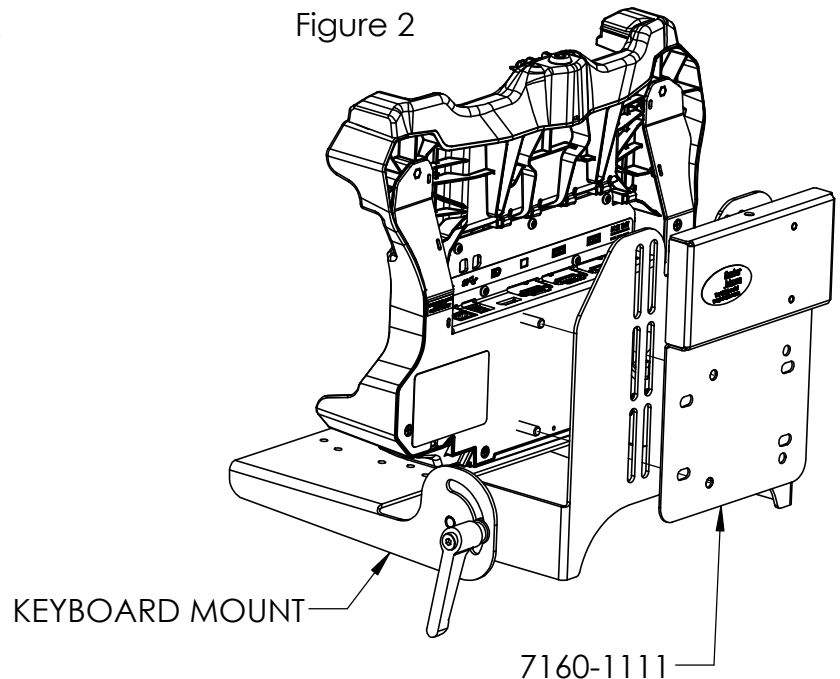

**Product Mounting Disclaimer**

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2017 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868