



INSTALLATION INSTRUCTIONS

Product
7160-1295

Revision
Rev.A

Form
INST-867

PETERBILT 579 DASH MOUNT

Printing Spec:PS-001

This instruction sheet is for the Gamber-Johnson Peterbilt 579 dash mount. For other products sold by Gamber-Johnson please reference their specific instruction sheets.

The Peterbilt 579 dash mount is designed to mount in the opening for the yellow parking brake and red trailer air supply pull knobs. You will need a Zirkona for Big Rigs mount to complete the solution.

Attaching the mount:

1. Remove the yellow and red pull knobs for the parking brake and trailer air supply by unscrewing them counter clockwise.


center dash panel
brake and air supply pull knobs



2. Remove the center dash panel by pulling it straight outward from the dash. It is held in place with spring clips.

3. Remove the (4) phillips head machine screws that hold the parking brake and air supply controller to the back side of the dash panel.

(4) phillips head machine screws

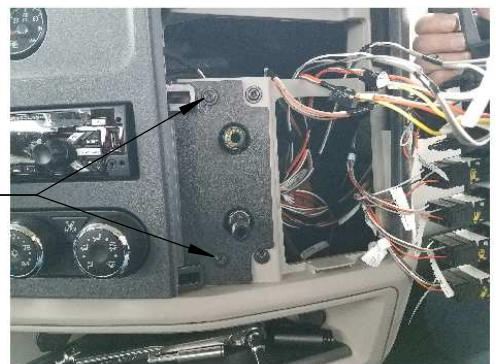

4. Place the dash panel bracket over the holes and reattach the (4) phillips head machine screws removed in step 3.

dash panel bracket



Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2018 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

Attaching the mount **(continued):**

5. Reattach the center dash panel removed in step 2.

6. Attach the offset mounting bracket with the (4) #10-32 nylock cap nuts supplied in hardware bag 7120-0881.

7. Reattach the yellow parking brake knob and the red air supply knob removed in step 1.

8. To complete your solution you will need a Zirkona for Big Rigs mount. Attach the Zirkona mount to the Peterbilt 579 dash mount with the #10-32 hardware supplied with the Zirkona mount.

9. Attach the device being mounted to the Zirkona for Big Rigs mount with the hardware supplied with the device. Position the mount for best viewing by the driver.


center dash panel



offset mounting bracket



device

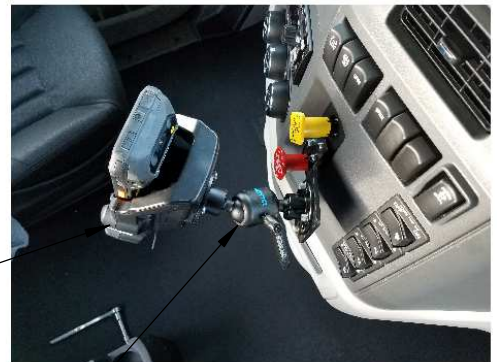

Zirkona for Big Rigs mount

