

# INSTALLATION INSTRUCTIONS

**Product** 

7160-1265-xx (-P & -E)

**Docking Station CF20** 

Revision

Form

**REV C** 

**INST-862** 


Printing Spec: PS-001

This instruction sheet is for the CF20 docking station. For instruction on features, setup and operation of CF20 computer, please refer to the manual provided by Panasonic with the computer.

This docking station is designed to be used with a variety of Gamber-Johnson mounting systems. Installation instructions for other Gamber-Johnson products are provided with each individual product.

This instruction sheet is for the following products:

7160-1265-00, (-P) & (-E) Docking Station- No RF, Keyed Alike 7160-1265-02, (-P) & (-E) Docking Station- Dual RF, Keyed Alike 7160-1265-04, (-P) & (-E) Docking Station- No RF, Keyed Different 7160-1265-06, (-P) & (-E) Docking Station- Dual RF, Keyed Different

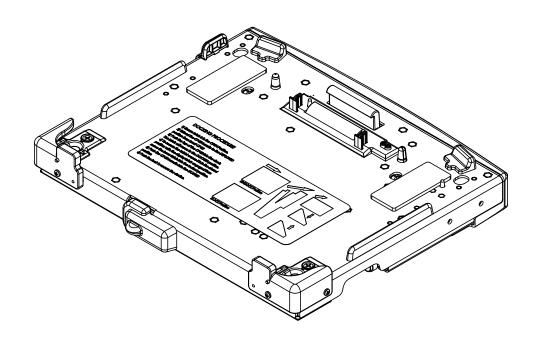

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

### PRE-INSTALLATION RECOMMENDATOINS

### Conduct a "Bench Test"

Gamber-Johnson strongly advises a "bench test" be conducted to verify all electronic and software issues are resolved prior to installation:

- Make sure the computer is operational by itself.
- 2. Insert computer into the docking station and verify that the computer is operating in the dock.
- 3. Interconnect entire assembly and verify start-up of all components, including other equipment (printers, modems, scanners, etc.)

Gamber-Johnson recommends positioning of all mounts and equipment in the vehicle prior to the actual install to verify that mounting locations are safe and practical.

### IMPORTANT SAFETY INFORMATION FOR INSTALLERS

Safety is dependent on the proper installation and servicing of this docking station. It is important to read and follow all instructions before installing this product.

To properly install a Gamber-Johnson docking station you must have a good understanding of automotive electrical procedures and systems, along with proficiency in the installation and service of aftermarket vehicle equipment.

There are no adjustments required at any time of the electrical components within the docking station. **Opening the docking station will void the product warranty.** 

### During Installation:

**DO NOT** connect this docking station to the vehicle battery until:

- 1. All other electrical connections are made
- 2. Mounting of all components is complete
- 3. Verification that no shorts exist in the entire system

**DO NOT** install equipment or route wiring or cords in the deployment path of any air bag.

When drilling into the vehicle, DO make sure that both sides of the surface are clear of anything that could be damaged.

**CAUTION:** If wiring is shorted to the frame, high current conductors can cause hazardous sparks resulting in electrical fires or flying molten metal.

#### After installation:

Test the docking station to ensure that it is working properly.

File these instructions in a safe place and refer to them when performing maintenance or reinstalling.

**WARNING**: Failure to follow all safety precautions and instructions may result in property damage, serious injury, or death.

### PRECAUTIONS FOR OPERATING THE DOCKING STATION

 If a Malfunction or Trouble Occurs, Immediately Stop Use

If a Malfunction Occurs, Immediately Unplug the Car Plug and Remove the Computer from this product


- This product is damaged
- The connector pins are bent
- A foreign object is inside this product
- Smoke is emitted
- An unusual smell is emitted
- Unusually hot

Continuing to use this product while any of the above conditions are present may result in fire or electric shock.

- If a malfunction or trouble occurs, immediately unplug the car plug and remove the unit from this product. Then, contact your technical support office for repair.
- Do Not Touch This Product or Cable When It Starts Thundering Electric shock may result.
- Do Not Place Containers of Liquid or Metal Objects on Top of This Product If water or other liquid spills, or if paper clips, coins, or foreign matter get inside this product, fire or electric shock may result.
  - If foreign matter has found its way inside, immediately unplug the car plug and remove the unit from this product. Then contact your technical support office.
- Avoid a Lot of Water, Moisture, Steam, Dust, Oily Vapors, etc.
   Otherwise, possibly resulting in fire or electric shock.
- Use Only the Specified Docking Station with This Product
   Using a Docking Station other than the one supplied (supplied with the unit or one sold separately as an accessory) may result in a fire.

- Do Not Connect a Telephone Line, or a Network Cable Other Than the one Specified, Into the LAN Port. If the LAN port is connected to a network such as the ones listed below, a fire or electric shock may result.
  - Networks other than 1000BASE-T, 100BASE-TX or 10BASE-T
  - Phone lines (IP phone (Internet Protocol Telephone), Telephone lines, internal phone lines (on premise switches), digital public phones, etc.)
- Using this product continuously in a hot environment will shorten the product life. Avoid use in these types of environments.
- When using in hot or cold environment, some peripherals may fail to work properly. Check the operation environment of the peripherals.
- Do Not Install This Product in Unstable State
   If balance of the unit is lost, it may fall over or drop, resulting in an injury.
- Docks used in the vertical (Tablet)
  position must be installed with the lock
  on TOP. Installing the dock upside
  down may result in damage to the
  computer.
- Do Not Install This Product Where There is a Lot of Water, Moisture, Steam, Dust, Oily Vapors, etc. Otherwise, a possibility of fire or electric shock could result.

# **DIMENSIONAL DRAWING**

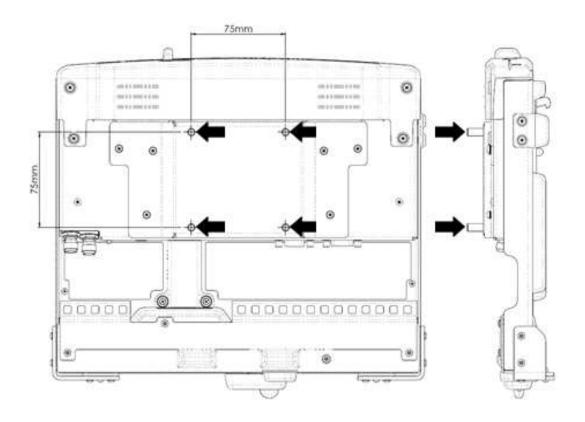

Installation fixing 75mm VESA studs are provided in the areas indicated by the arrows in the figure above.

### DOCKING AND UNDOCKING THE COMPUTER

#### DOCKING PROCEDURE

1. Ensure latch is in the "OPEN" Position

2. Extend the CF-20 handle to the "DEPLOYED" position then insert CF-20


3. Push the top of the CF-20 into the dock. The latch will move to the "Docked" position

4. To secure the tablet ensure it is in the closed position with the display latch engaged then move the lower latch into the locked position 5. Push the CF-20 handle into the "STOWED" position

6. Push the lock to secure the device

#### NOTES:


Ensure latch is fully in the "Docked" position. It is recommended that the CF-20 is pushed into the dock with two hands. For CF-20 fitted with Gadget option, it may be necessary to attach the main unit in the forward direction only. Refer to device manual for further information.

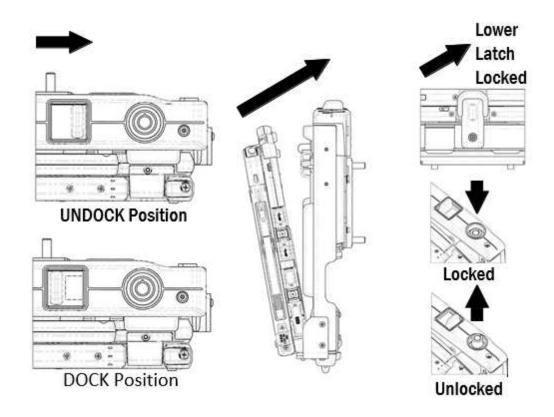


#### NOTE:

Portions of your Docking Station may differ somewhat from the illustrations in the operating instructions, but this should present no problems in actual use. Be sure to follow the operating instructions when using your Docking Station.

# **CF20 DOCKING STATION FEATURE IDENTIFICATION**

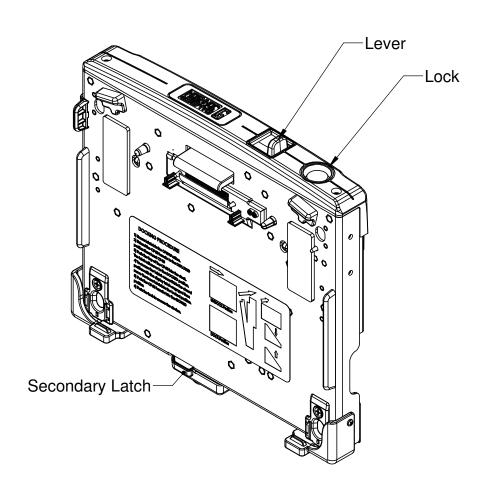

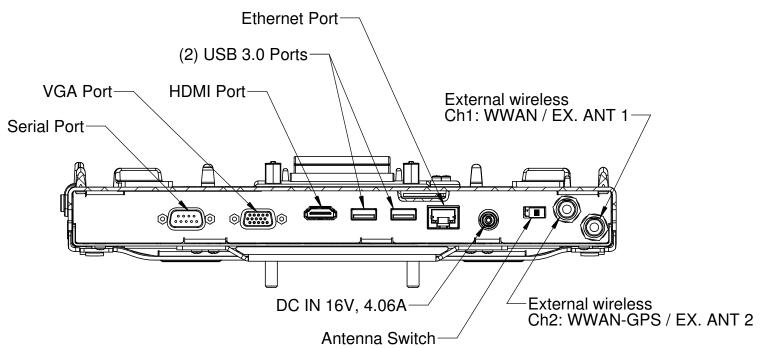

## **SPECIFICATIONS**

Item	Description
Power Supply Input	DC 15.6V-16V Must use approved FCC/E-marked PSU
Expansion Bus Connector	24-Pin
USB Port*	USB 3.0 x 2
LAN Port	RJ-45 x 1
HDMI Port**	HDMI x 1 For exclusive use with HDMI standard
VGA Port	Mini Dsub 15-pin female (Analog interface)
Serial Port	Dsub 9-pin male
Physical Dimension [WxHxD]	290x277x75mm (11.42x10.91x2.95")
Weight	2.28kg(5 lb)

Does not guarantee operation of all USB and HDMI-compatible peripherals When connecting the HDMI compatible display, specifications such as maximum resolutions available to output differ, depending on the specifications of the connected devices. See the specifications of the connected device for details.

### REGULATORY CERTIFICATION INFORMATION

Regulatory Model #: 7160-1265

GJ Model #'s:

7160-1265-00, 7160-1265-00-E, 7160-1265-00-P 7160-1265-02, 7160-1265-02-E, 7160-1265-02-P 7160-1265-04, 7160-1265-04-E, 7160-1265-04-P 7160-1265-06, 7160-1265-06-E, 7160-1265-06-P

Descriptions: Dock-Panasonic CF20

### Certifications:

- EN 55032:2012 Class B
- EN 50498:2010
- EN 50581:2012
- EN 62368-1

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions.

(1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.











Gamber-Johnson LLC 3001 Borham Ave. Stevens Point, WI, 54481 USA 715-344-3482