


## PSD-D

### Installation Guide

**Double Sided Ceiling Mount for Display Panels  
up to 250 lbs / 113.4 kg per unit**

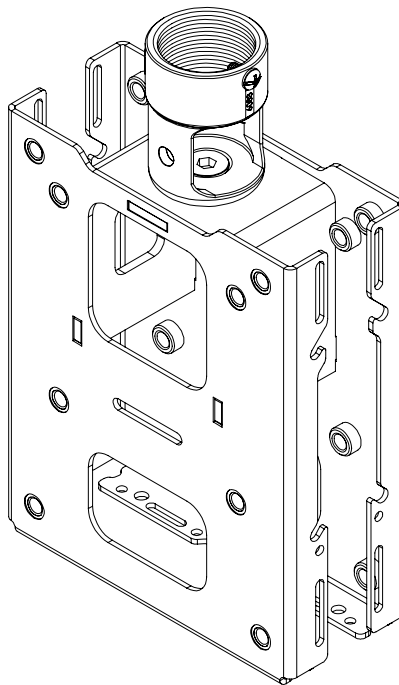

INST-1239 REV A





**Rated Capacity**

**500 lbs / 226.8 kg**  
(Net capacity)

**250 lbs / 113.4 kg**  
(per display panel)

The wall or ceiling structure must support at least four times the weight of the display panel. If not, the mounting structure must be reinforced in order to prevent damage or injury.

**Warning Statements**



Prior to the installation of this product, the installation instructions must be read and completely understood. Keep these installation instructions in an easily accessible location for future reference.



Proper installation procedure by a qualified service technician must be followed, as outlined in these installation instructions. Failure to do so could result in property damage, serious personal injury, or even death.



Safety measures must be practiced at all times during the assembly of this product. Use proper safety equipment and tools for the assembly procedure to prevent personal injury.



Premier Mounts does not warrant against damage caused by the use of any Premier Mounts product for purposes other than those for which it was designed or damage caused by unauthorized attachments or modifications, and is not responsible for any damages, claims, demands, suits, actions or causes of action of whatever kind resulting from, arising out of or in any manner relating to any such use, attachments or modifications.



At least two qualified people should perform the assembly procedure. Personal injury and/or property damage can result from dropping or mishandling the flat panel.



If mounting to wall studs or ceiling studs, make sure that the mounting screws are anchored into the center of the wall studs or ceiling studs. Use of an edge-to-edge stud finder is recommended.



Be aware of the mounting environment. If drilling and/or cutting into the mounting surface, always make sure that there are no electrical wires in wall. Cutting or drilling into an electrical line may cause serious personal injury.



Make sure there are no water or natural gas lines inside the wall where the mount is to be located. Cutting or drilling into a water or gas line may cause severe property damage or personal injury.









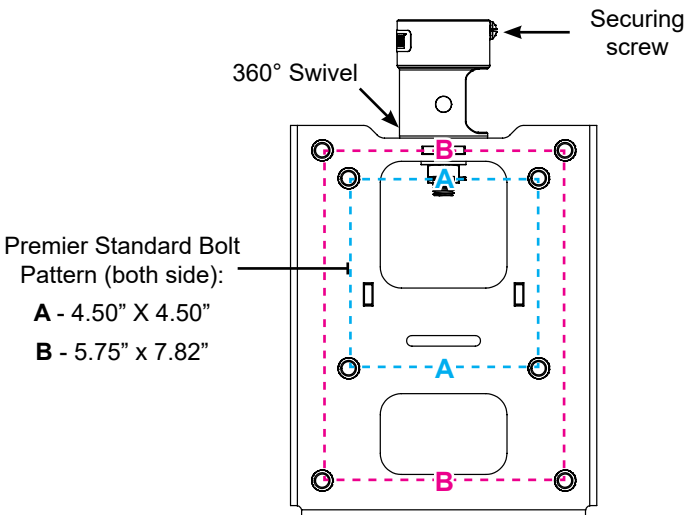
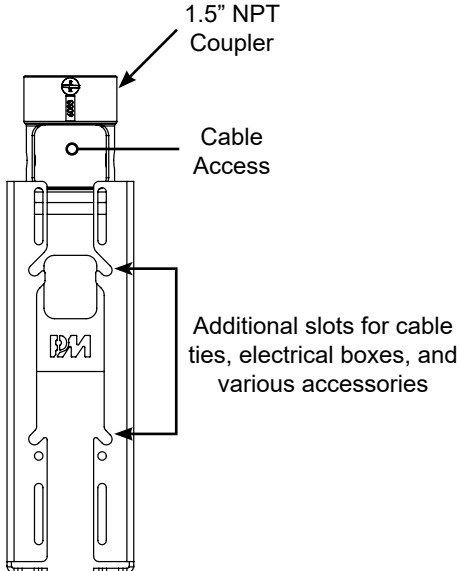



This product is intended for indoor use only. The use of this product in outdoor applications requires modification and additional structural support to account for wind.




Do not install near sources of high heat. Do not install on a structure that is prone to vibration, movement or chance of impact.




MODEL	HARDWARE
	<div> 3/8"-16 x 1.00" Hex (Qty 8)</div> <div> 8-32 x .625" Pan Head (Qty 4)</div> <div> #14 x 1" Wood Screw (Qty 4)</div> <div> 3/8" Washer (Qty 8)</div> <div> 8-32 Lock Nut (Qty 4)</div> <div> #8 Washer (Qty 8)</div> <div> Cable Ties (Qty 8)</div>
FEATURES	
<div><p>360° Swivel</p><p>Securing screw</p><p>Premier Standard Bolt Pattern (both side): A - 4.50" X 4.50" B - 5.75" x 7.82"</p></div> <div><p>1.5" NPT Coupler</p><p>Cable Access</p><p>Additional slots for cable ties, electrical boxes, and various accessories</p></div> <div><p>Additional slots for cable ties, electrical boxes, and various accessories</p></div>	



1

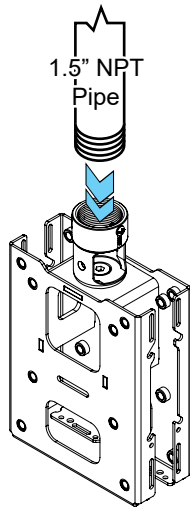


2

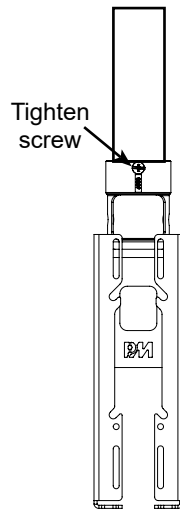


3b


### Single Pipe Mounting

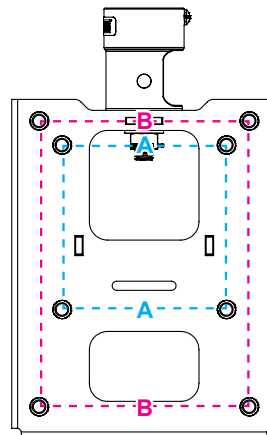


Mounting position A or B



CTM-MS1, CTM-MS2



PFDM2, PTDM2




P2642, P4263, PFDM2, PTDM2

3a

Install the wall plate (from supported display mounts) centered to the double side ceiling mount using 3/8"-16 screws, and washers. The mounting position will vary by model. Compatible products with the following page shown in step 3b.





x4 per side

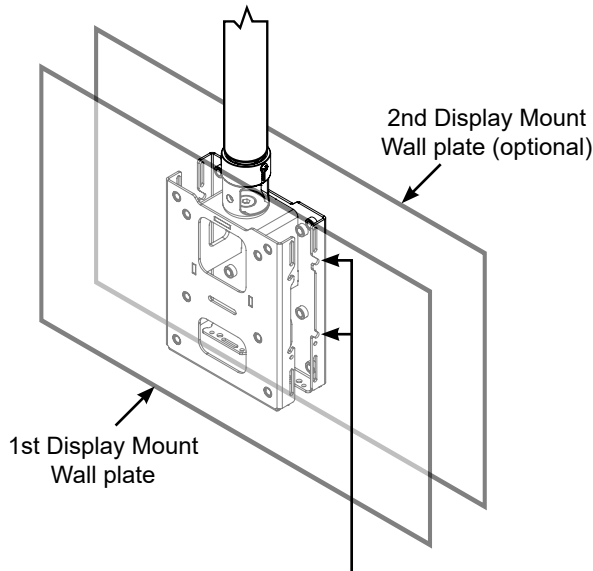


Side of the mount is for mounting electrical boxes and other accessories. See page 5.

### Dual Pipe Mounting

Notes: A second PSD-D is required for this configuration.

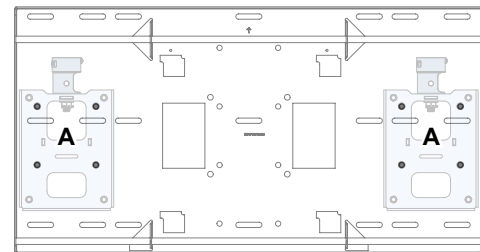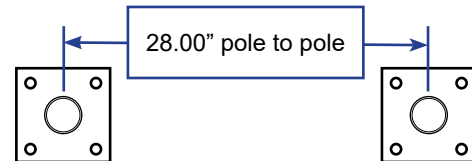

CTM-MS3

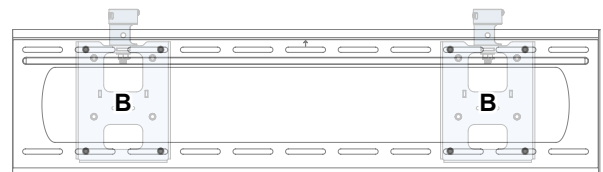

P5080, P4263\*

\*P4263 can be utilized in this arrangement, spaced approx. 24.0 inch pole to pole or end to end of the plate.





## Optional: Electrical Boxes and Accessories


4

Use a variety of slots and holes, located on the sides and bottom of the mount, to secure cable ties, install electrical boxes, or attach other accessories.

Use the supplied self-tapping screw for the installation of the electrical boxes or 8-32 screws, bolts, and nuts for mounting an accessory.

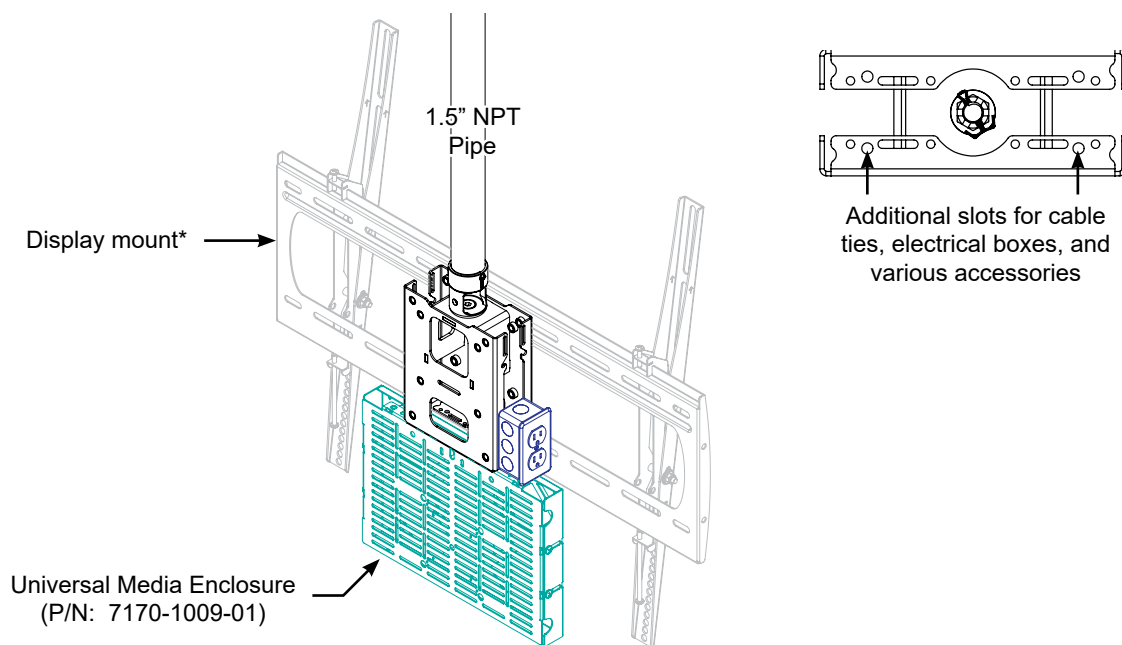

\*Display mount shown on one side for visual clarity.

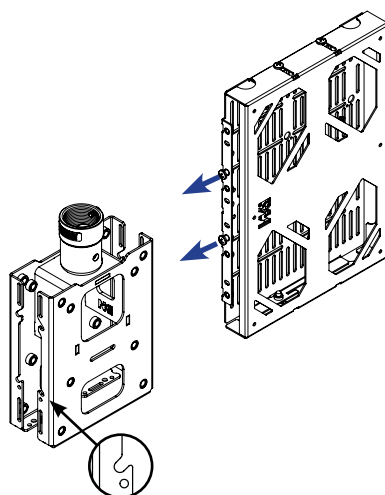

The universal media player enclosure may be fastened to either the side or bottom of the mount. Alternatively, the hooks can be used to quickly mount the brackets.

## Related Products: Double-Sided Ultra-Tilt T-Bar Ceiling Mount

