


PPS-PTM / PPS-PTB

Installation Guide

Tabletop Point of Sale Mount for
displays up to 15 lbs / 6.8 kg

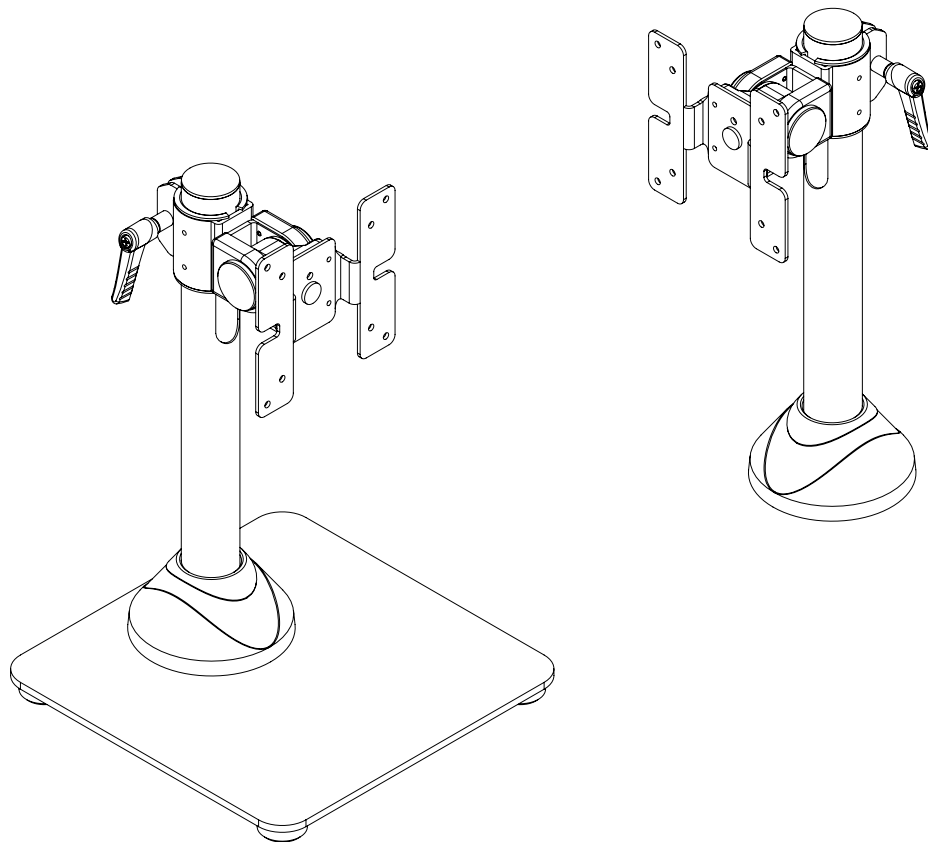

INST-1292 REV A





Rated Capacity

15 lbs / 6.8 kg

Maximum Flat Panel Weight:

Warning Statements



Premier Mounts does not warrant against damage caused by the use of any Premier Mounts product for purposes other than those for which it was designed or damage caused by unauthorized attachments or modifications, and is not responsible for any damages, claims, demands, suit actions or causes of action of whatever kind resulting from, arising out of or in any manner relating to any such use, attachments or modifications.



Safety measures must be practiced at all times during the assembly of this product. Use proper safety gear and tools for the assembly procedure to prevent personal injury.



Prior to the installation of this product, the assembly instructions should be read and completely understood. The assembly instructions must be read to prevent personal injury and property damage. Keep these assembly instructions in an easily accessible location for future reference.




Do not install on a structure that is prone to vibration, movement or chance of impact. Failure to do so could result in damage to the display and/or damage to the mounting surface.



Do not install near heater, fire place, direct sunlight, air conditioning or any other source of direct heat energy. Failure to do so may result in damage to the display and could increase the risk of fire.



Dimensional Drawing

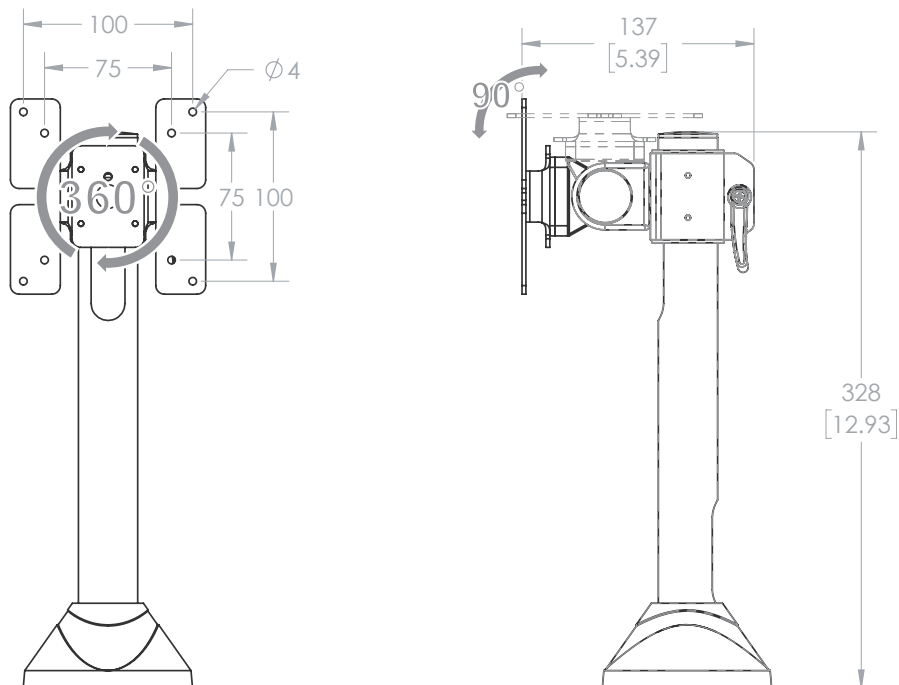


Dimensions in mm [inches]




PPS-PTM

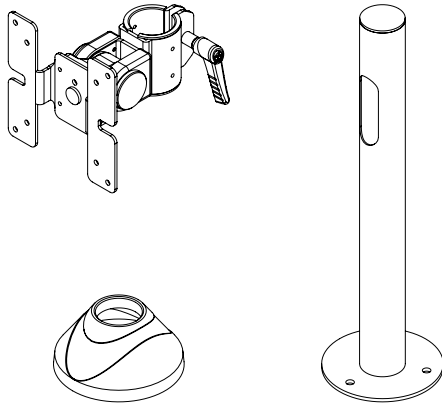

M4 x 10mm
(Qty 4)





#10 x 1-1/4"
(Qty 3)




13mm Wrench
(Qty 1)

PPS-PTB

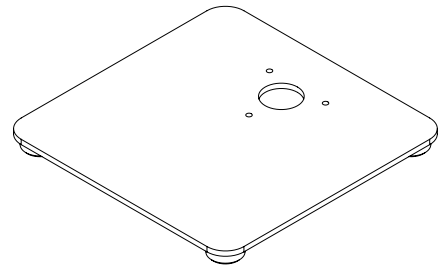


M6 x 12mm
(Qty 3)



M6 Allen Key
(Qty 1)


Scale 1:1

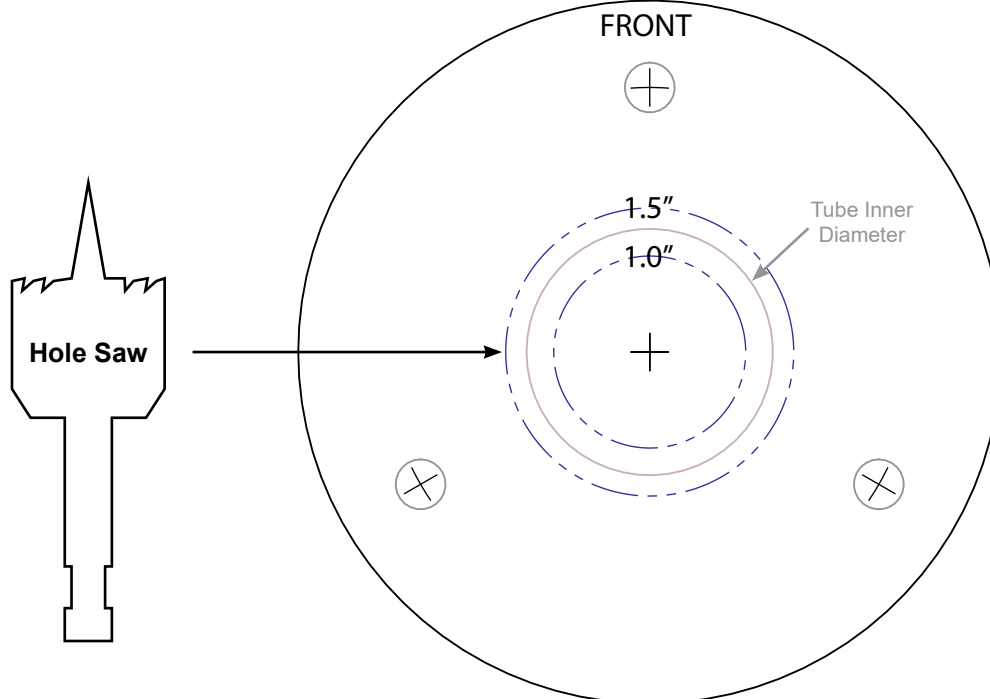



WOOD APPLICATION


1a

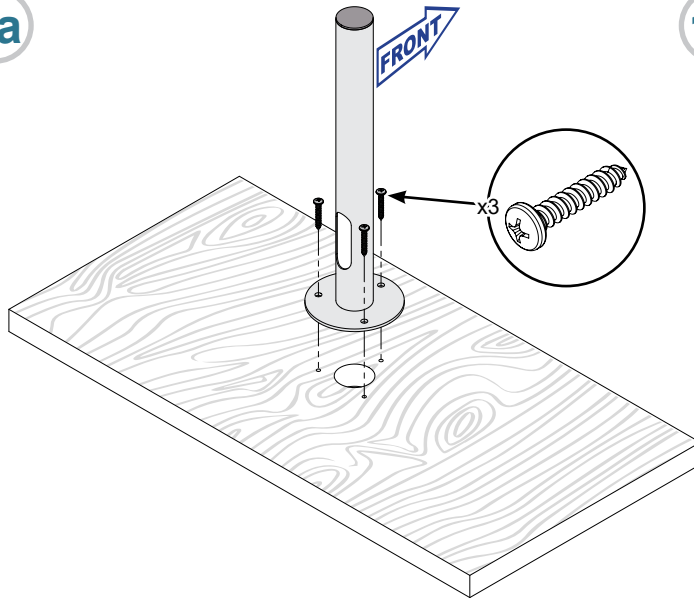


Optional: Use a hole saw to create a hole with a diameter of 1 to 1.5 inches in the wooden top for cable access through the bottom.

TABLETOP STAND


1b

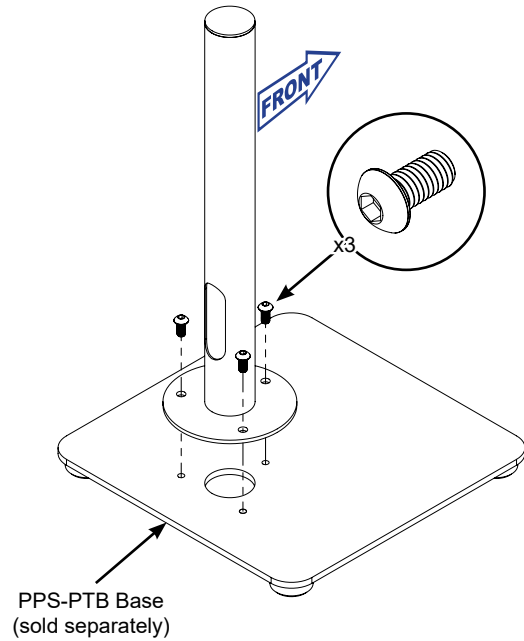

2



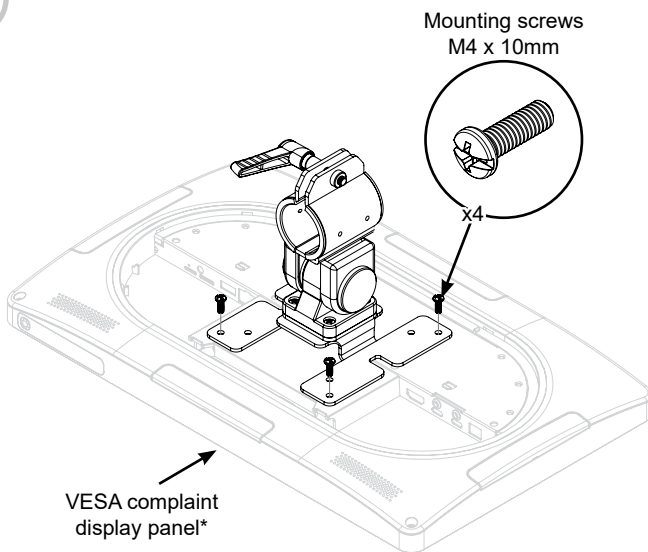


*Microtouch M1-156IC shown for reference.

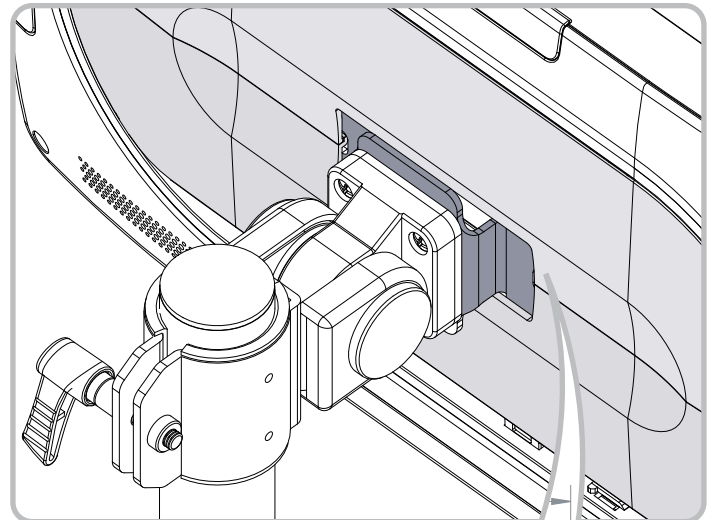

Note: Relief cutout exclusively for Microtouch M1-156IC & M1-215IC wire cover

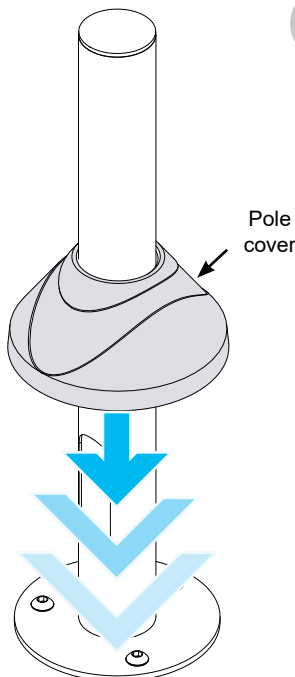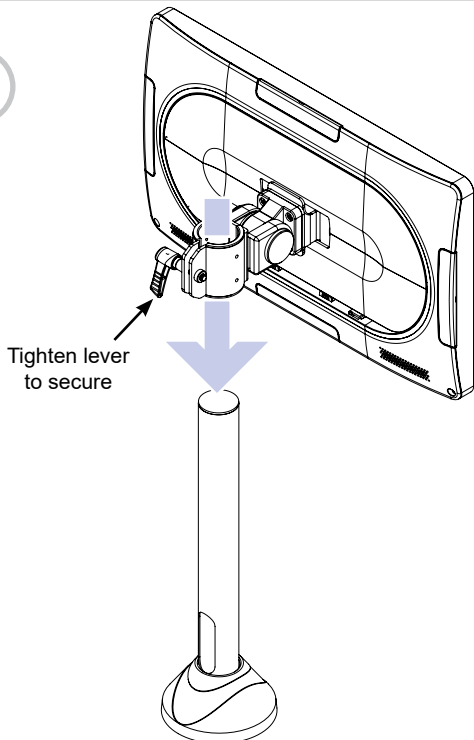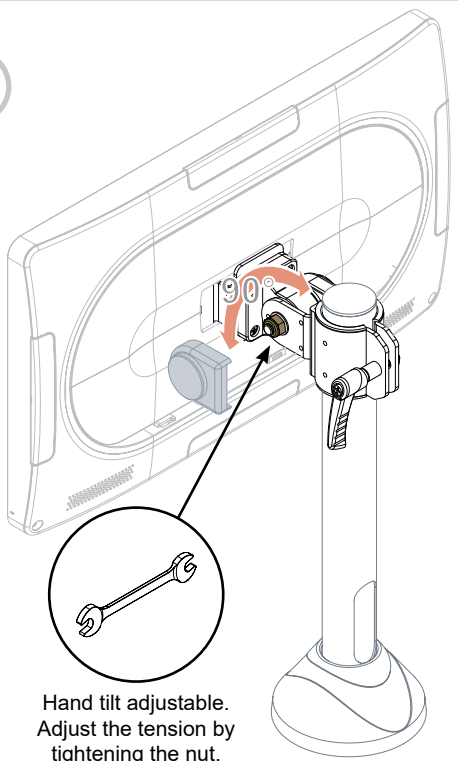

INSERT THE POLE COVER	INSTALLING THE POLE MOUNT	OPTIONAL: TENSION ADJUSTMENT
3  Pole cover	4  Tighten lever to secure	5  Hand tilt adjustable. Adjust the tension by tightening the nut.

END OF INSTRUCTIONS



Premier Mounts Office

A 500 W Central Ave, STE A
Brea, CA 92821, USA

P 1-800-368-9700

E orders@premiermounts.com

W premiermounts.com



Gamber-Johnson World HQ

A 5001 Joerns DR
Stevens Point, WI 54481, USA

P 1-715-344-3482

F 1-715-344-5209

W gamberjohnson.com

