


AWMX-OH55

Installation Guide

Outdoor Flat/Tilt Wall Mount
For Samsung OH55

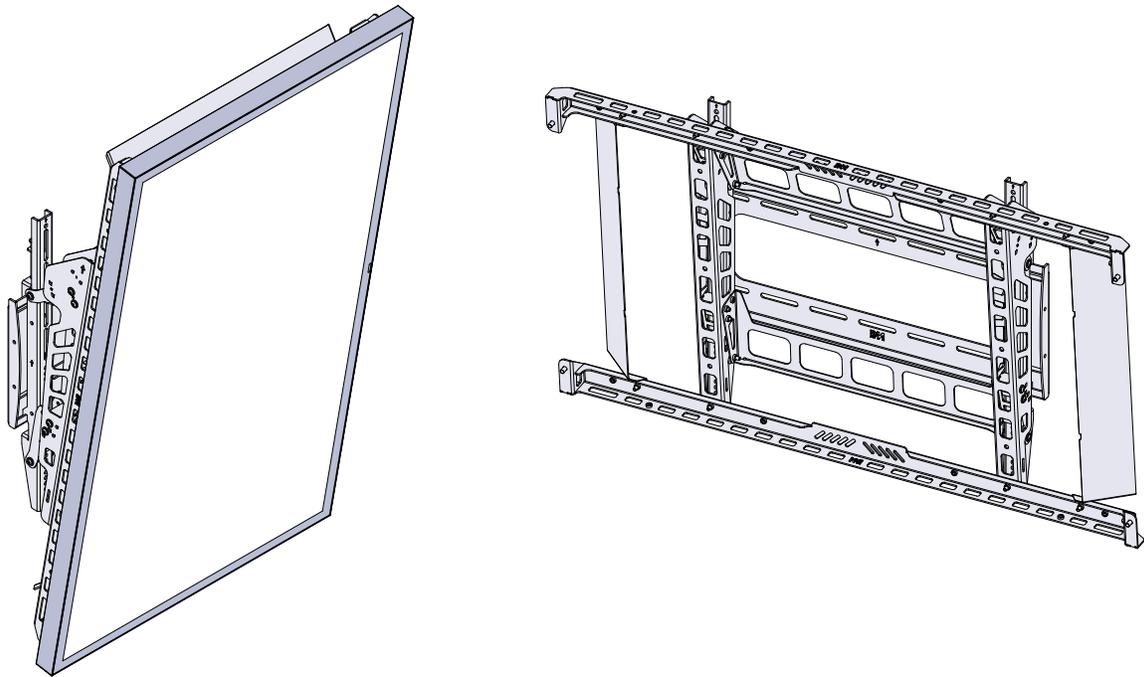

INST-1095 REV C



BASIC INFORMATION

Wall mount model	AWMF-OH55 (Flat) AWMT-OH55 (Tilt)
Display Model	OH55A, OH55F, OH55DX
Installation Configuration	Landscape Portrait
Tilt Feature	Available on AWMT-OH55 Fixed position 0 ° (Flat), 5 °, 10 °, 15 °
Environment Temperature	Negative 30 Celsius to 50 Celsius, 24/7 operation
Wall Application	Solid concrete, Hollow Brick, or 3/4" plywood-backed wall

INSTALLATION ENVIRONMENT


Beach	Must not be placed in areas where seawater is accessible
Wind	Must not be placed in areas with strong winds caused by storms or other natural phenomenon
Snow	Awning or cover is needed to avoid snow piling directly onto inlet
Iron Dust	Suitable, (e.g. train or subway station)

ENCLOSED OR RECESS AREA


Clearance	50mm (1.97") minimum all around
Additional front glass	Prohibited in any enclosed area




CORE COMPONENTS:

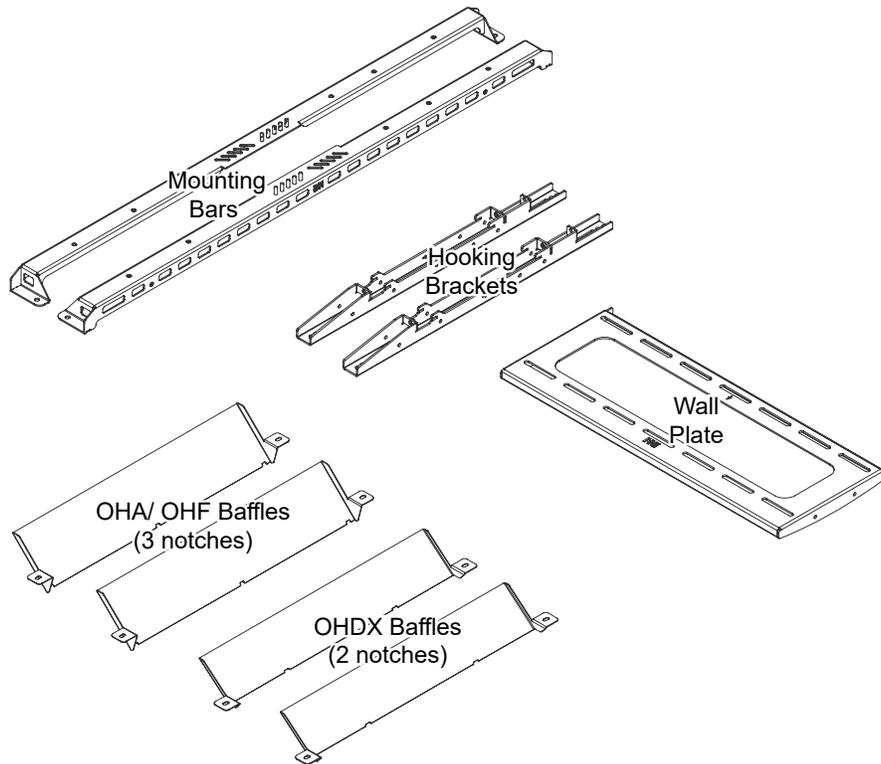

TILT ADAPTER (OPTION):

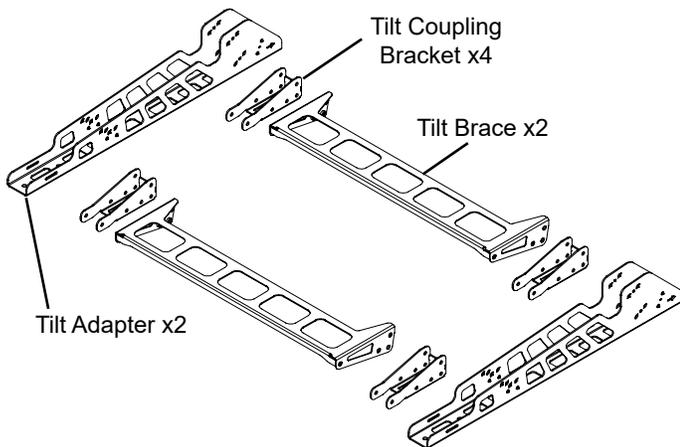

1/4-20" x 2-1/2"
Button Head




1/4" Flat Washer


HARDWARE:



1/4-20" x 5" Pan Head




1/4-20" x 3/4"
Button Head




1/4" Flat Washer



5/16" x 3" Hex Lag




5/16" Split Lock Washer




5/16" Flat Washer



Shell Expansion Anchor



M8 x 16mm Hex Bolt






Lock-it Security Barrel






Solid Concrete/Brick

Use proper mounting guideline per state code.

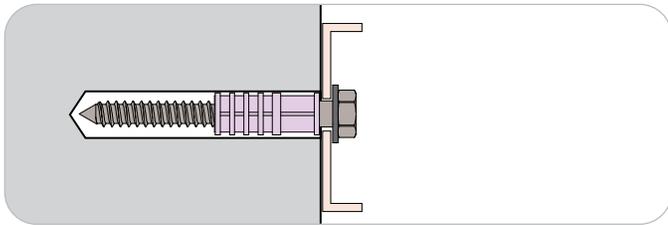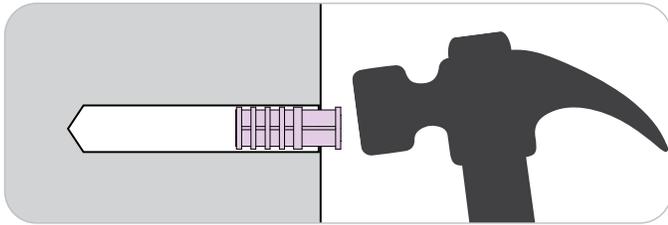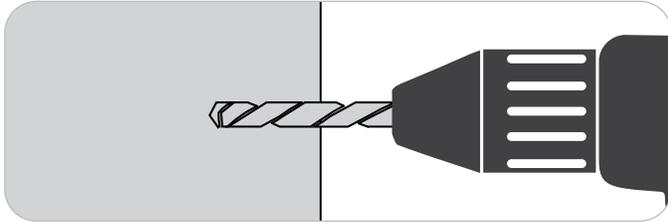

Brick (Alternative)


All hardware, threaded rod, epoxy, and other mounting hardware are not supplied. Shown for reference only.

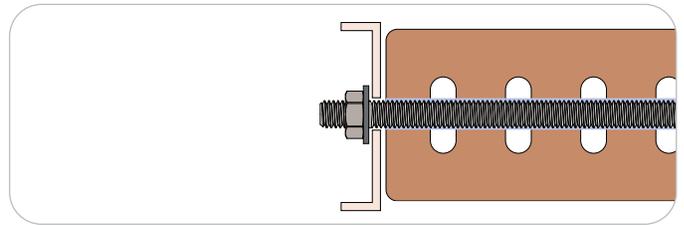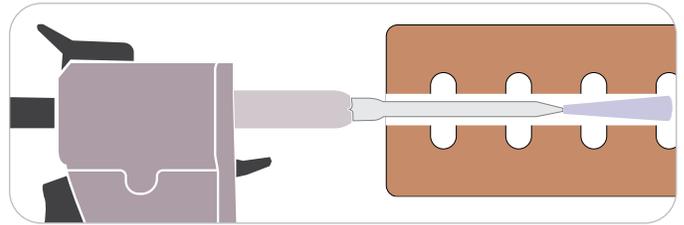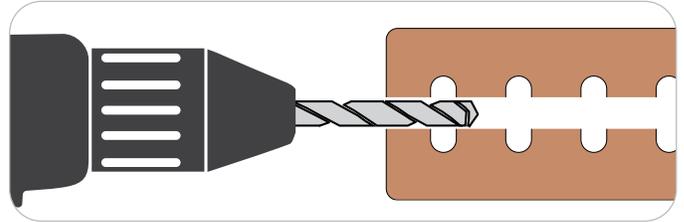

Use diagram shown in next page for positioning the wall plate.

1a


CONCRETE/BRICK

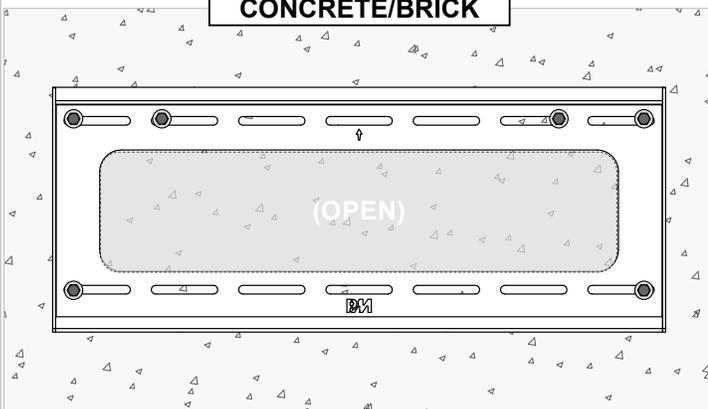

Requires a minimum of 4 mounting screws on upper slots and 2 on bottom slots. Shell expansion anchors are suitable for both concrete and brick.

1b

3/4" PLYWOOD-BACKED

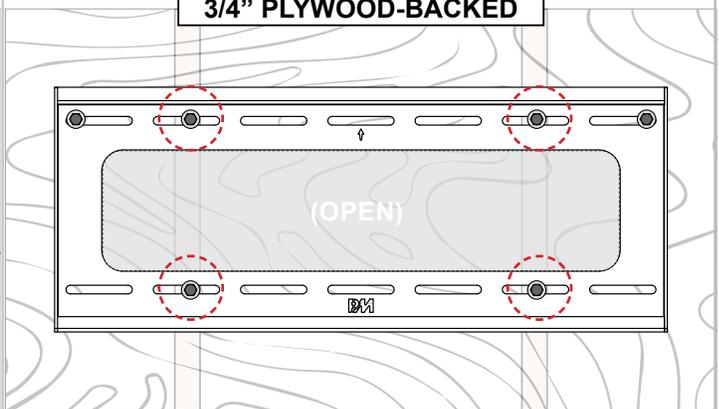


Requires at least 4 mounting screws into wood stud and 4 mounting screws on the upper slots. Shell expansion anchors are not used for this application.

1c

LANDSCAPE


Letter	0 °	5 °	10 °	15 °
A	10.3 [262]	9.9 [251]	9.1 [231]	8.1 [206]
B	18.6 [472]	19.0 [483]	19.6 [498]	20.1 [511]
C	5.5 [140]	8.6 [218]	11.6 [295]	14.6 [371]
D	5.5 [140]	6.0 [152]	6.6 [168]	7.1 [180]

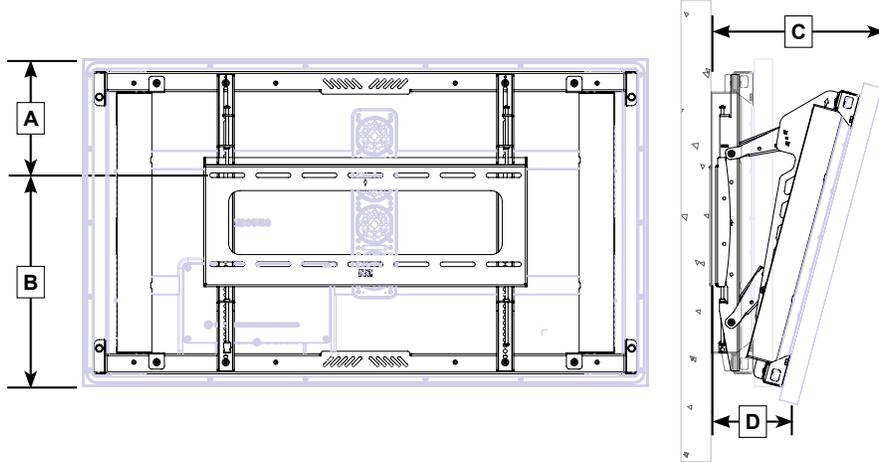

1d


PORTRAIT

Letter	0 °	5 °	10 °	15 °
A	20.7 [526]	20.2 [513]	19.4 [493]	18.2 [462]
B	29.0 [737]	29.4 [747]	29.8 [757]	30.2 [767]
C	5.5 [140]	9.4 [239]	13.4 [340]	17.2 [437]
D	5.5 [140]	5.1 [130]	4.8 [122]	4.5 [114]


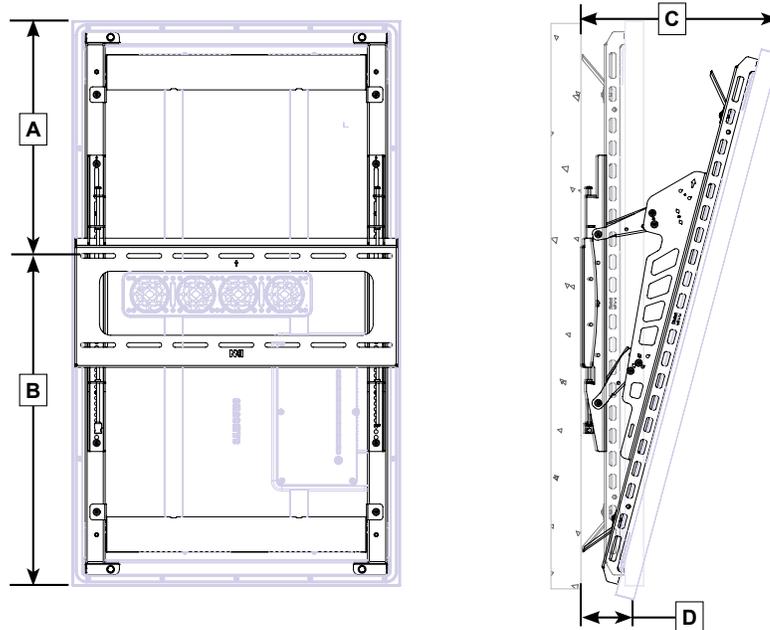


2

Torque: 12 to 15 kgf/cm 67 to 84 lbf/in 4 Places			
	M8 x 16mm Hex Bolt	5/16" Split Lock Washer	5/16" Flat Washer

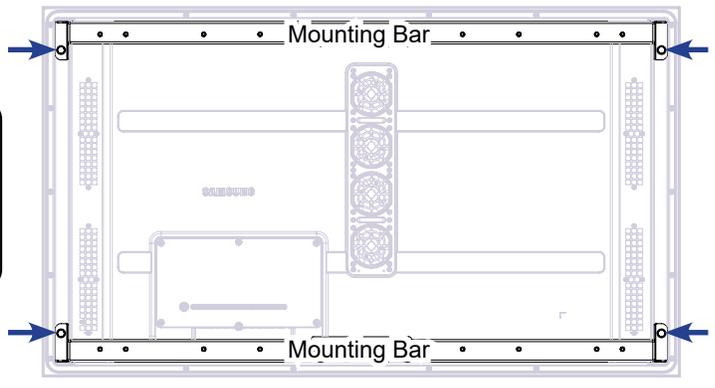





3

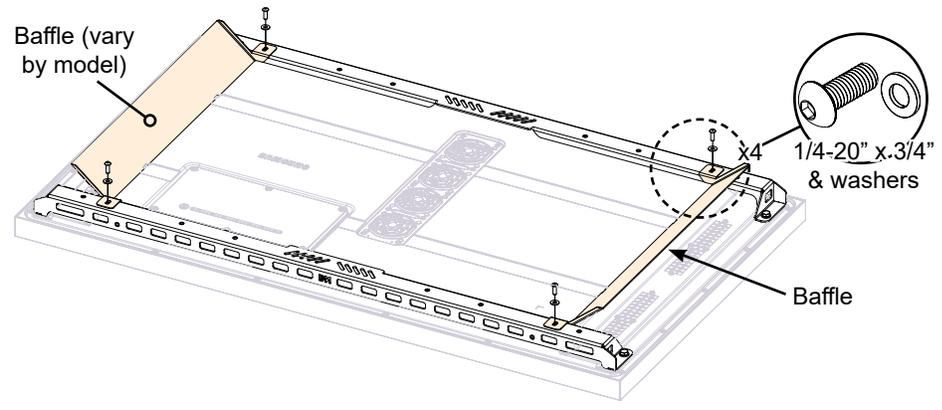


Model	# of Notches
OHDX	2
OHA / OHF	3

4

Install flat or tilt brackets (Bracket B only, see next page for detail) directly to the mounting bar. The brackets must face the same direction (as indicated by the up arrow) as the display panel. Shown using flat brackets for visual clarity.

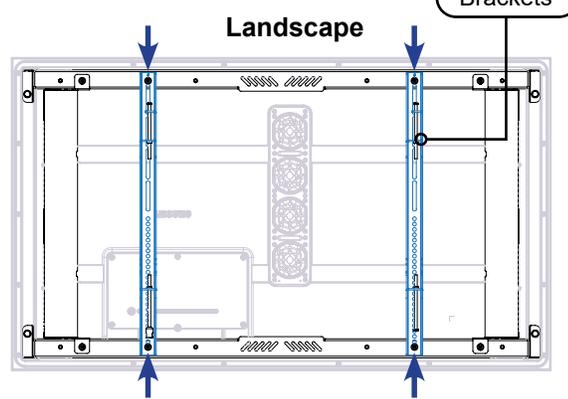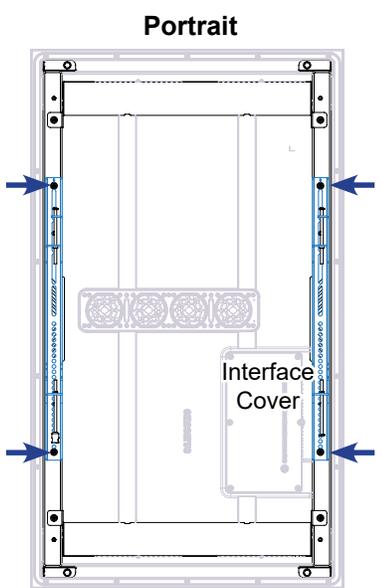


Both flat and tilt brackets have the same mounting pattern.



Tilt Bracket B


5a

FLAT BRACKETS

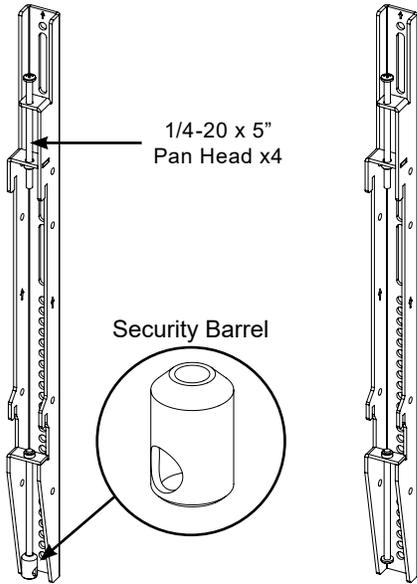



SECURITY OPTION

Place a lock through the security barrel to block access to the locking screws, preventing the mount from being tampered with or disengaged.

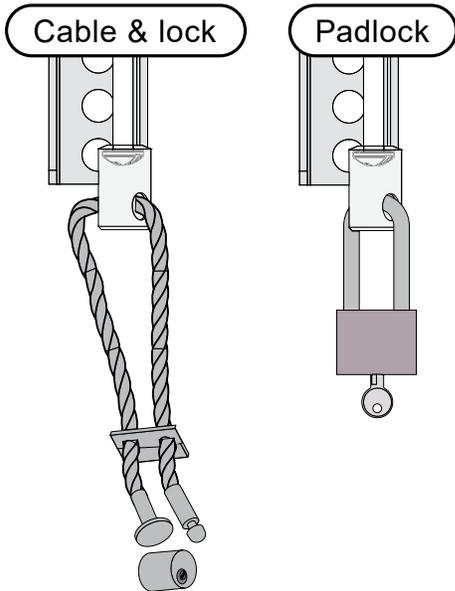

4b


TILT BRACKETS

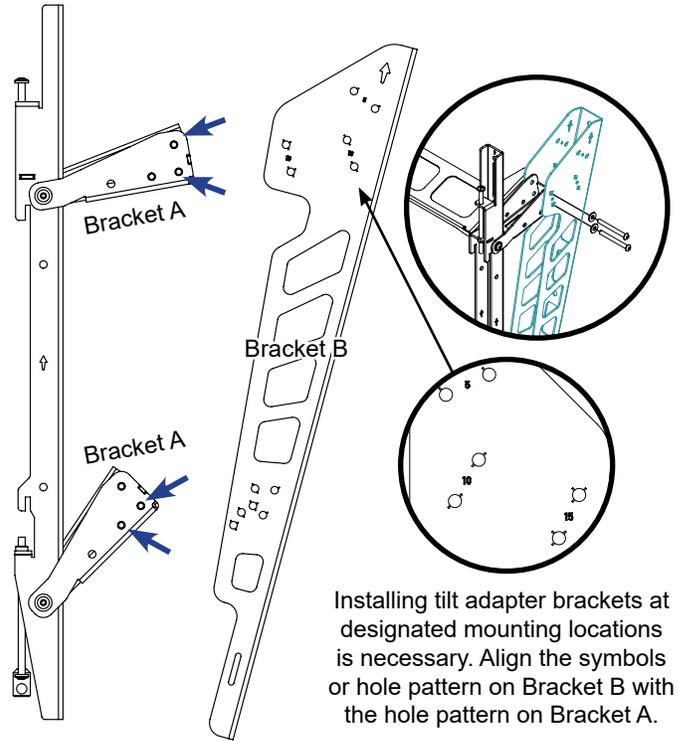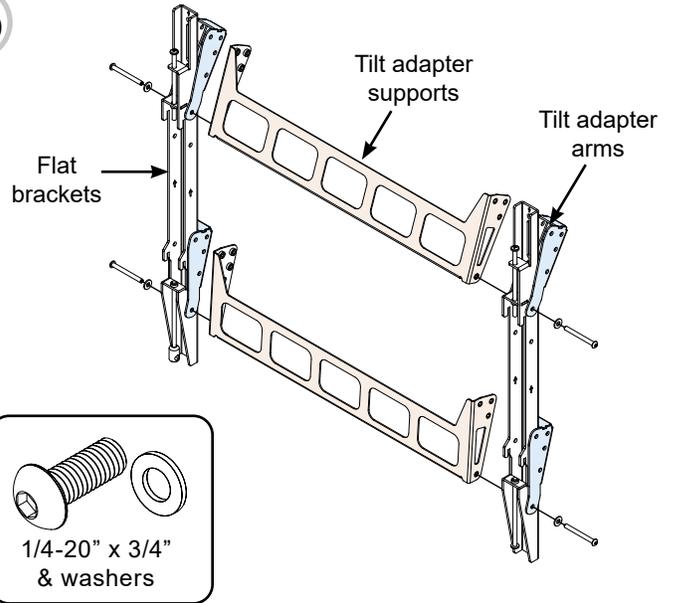

Installing tilt adapter brackets at designated mounting locations is necessary. Align the symbols or hole pattern on Bracket B with the hole pattern on Bracket A.


Degree(s)	Symbols
0°	N/A
5°	1 notch
10°	2 notches
15°	3 notches

6

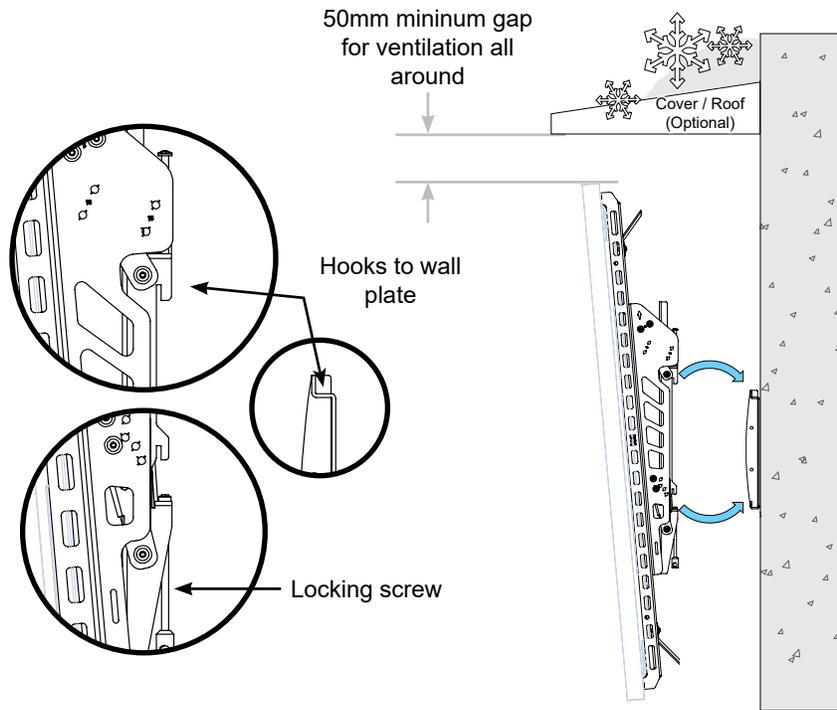

Shown: Portrait at 5 deg tilt

7

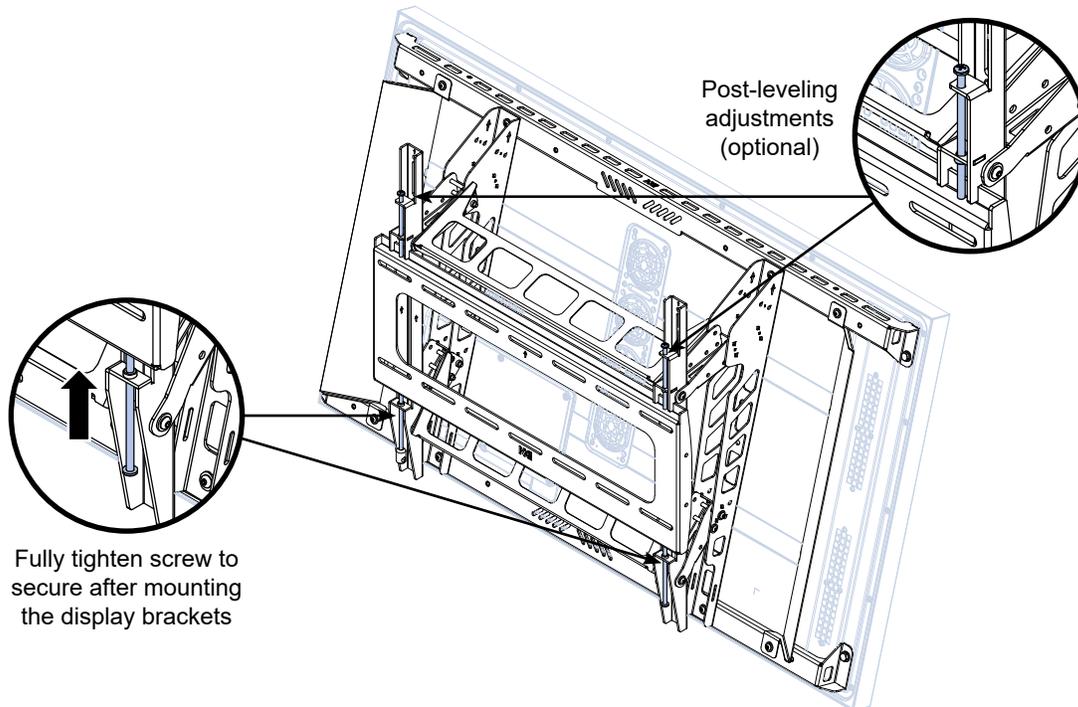

Shown: Landscape at 15 deg tilt