




**PM PSD-ROO**

The PSD-ROO is the ultimate portable solution for your flat panel & interactive displays. Engineered for effortless adaptability, this heavy-duty stand accommodates displays up to 75 inches & 150 lbs. Its low-profile, ADA-compliant & UL Certified design ensures smooth integration into any space. Moving your visuals with confidence has never been easier with the Roo's robust 4-inch casters & handles. The ROO also features integrated cable management to provide a safe & aesthetically pleasing install. From dynamic classroom presentations to engaging retail signage, live event broadcasts, conference rooms & collaborative spaces, the PSD-ROO cart is engineered for optimal flexibility!

**FEATURES + BENEFITS**



- Turnkey design for fast assembly & deployment.
- Height adjustable: Secure display anywhere along the column.
- Accessory shelf supports laptops & devices up to 12.5lbs.
- Robust 4" locking swivel casters ensure stable positioning.
- 10° of downward tilt.
- Ergonomic handles provide secure & easy control while moving.
- Integrated cable management keep your install clean & safe.
- UL 1678 & Tall Institutional Cart Certified.

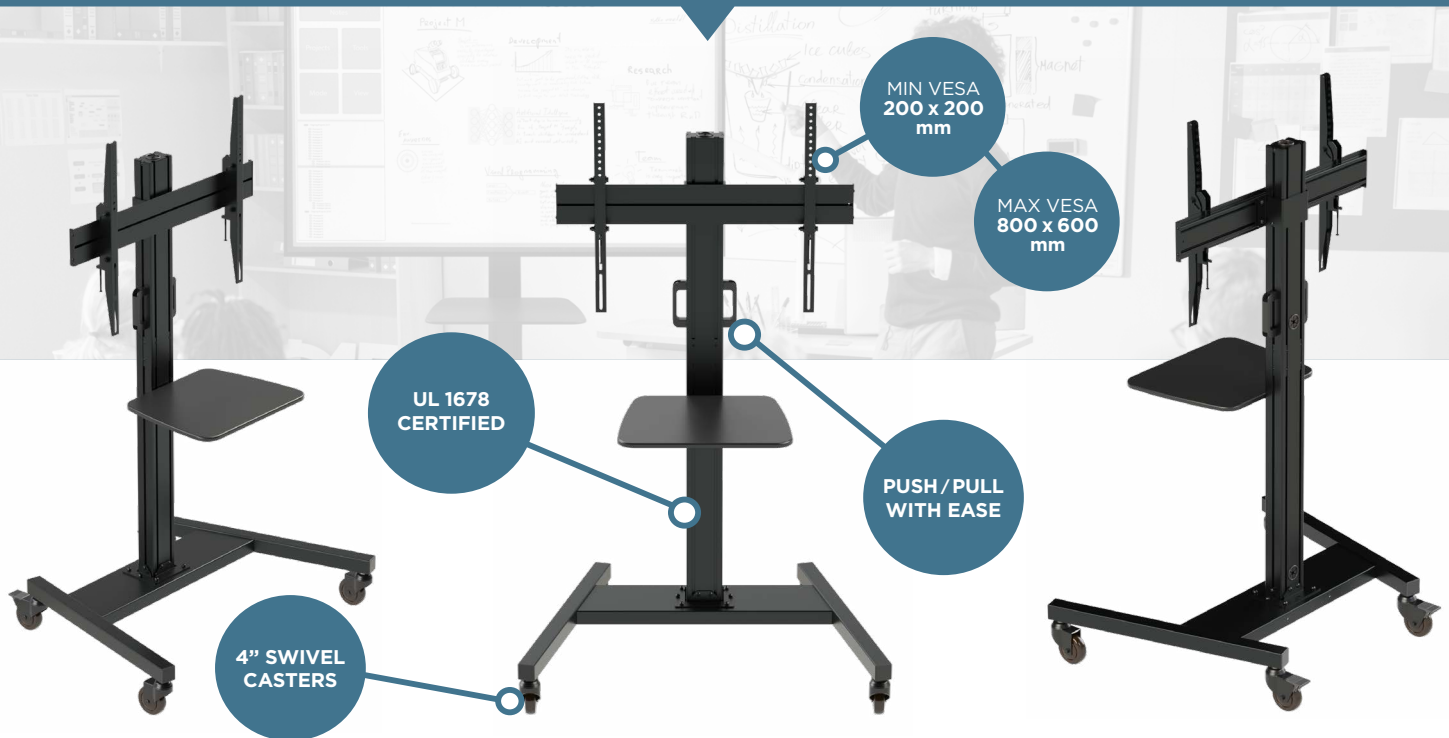



PRODUCT SPECIFICATIONS	
PART #	PSD-ROO
WIDTH	42.42" (1077.47mm)
MAX HEIGHT & CENTERLINE HEIGHT	<b>MAX:</b> 73.46" (1865.88mm) -- <b>CENTERLINE:</b> 61" (1549.4mm)
DEPTH	30.39" (772mm)
VESA MOUNTING PATTERN	200 x 200mm – 800 x 600mm
WEIGHT CAPACITY	<b>DISPLAY:</b> 150 lbs. (68.04kg) -- <b>SHELF:</b> 12.5 lbs. (5.67kg)
PRODUCT WEIGHT	66.8 lbs. (30.3kg)
PACKAGED WEIGHT	86.4 lbs. (39.2kg)
PACKAGE DIMENSIONS	44" x 32" x 11" (1117.6 x 812.8 x 279.4mm)

## CAD DRAWINGS

**SECTION A-A  
CART BASE DETAIL**

- [404] 15.89
- [763] 30.02
- [772] 30.39

**MAX DISPLAY MOUNTING**  
[800] 31.50

**MAX DISPLAY MOUNTING**  
[600] 23.62

**DISPLAY CENTER  
MAX HEIGHT**  
[500] 19.69  
[1549] 61.00

**10° TILT**

**ADJUSTABLE HEIGHT SHELF  
12.5 LB CAPACITY**

**4" POLYURETHANE CASTERS,  
(2) LOCKING**

**Labels:** CABLE ROUTING HOLE, TILT DISPLAY BRACKETS, ADJUSTABLE HEIGHT DISPLAY MOUNT, (2) HANDLES, CABLE ROUTING HOLES

**Dimensions:** [405] 15.94, [1598] 62.93

**Minimum VESA: 200x200mm**  
**Maximum VESA: 600x800mm**