


GB-INWAVPL

Installation Guide

Installationsanleitung, Guía de Instalación, Guida de Installazione, Guide d'Installation, Installatie gids

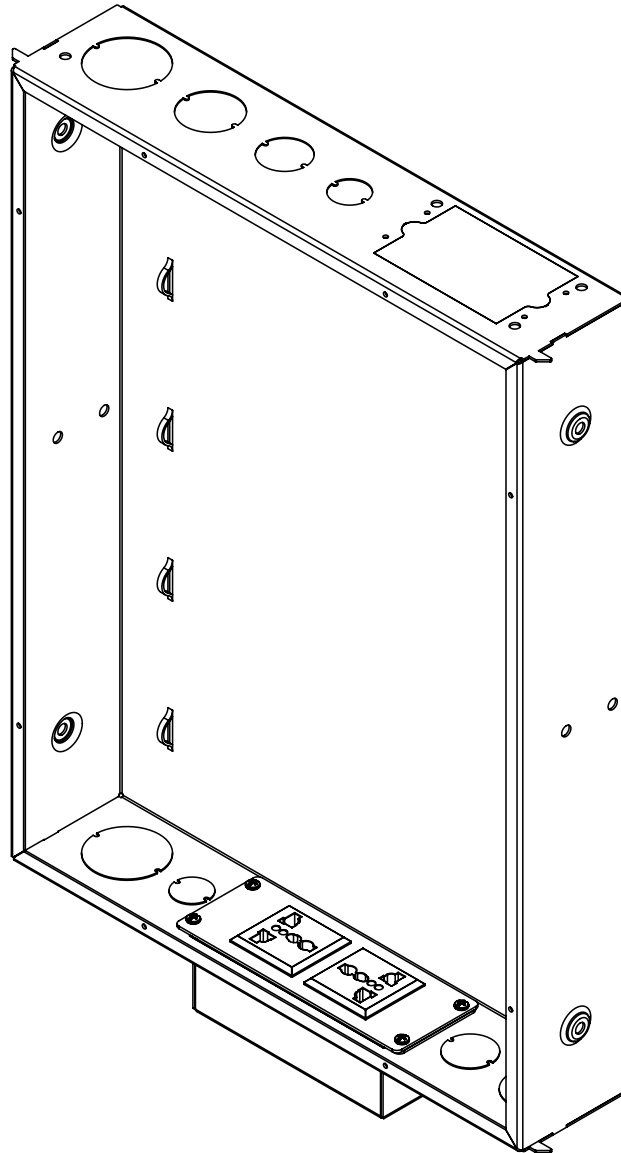


GB-INWAVPL

Installation Guide


Installationsanleitung, Guía de Instalación, Guida de Installazione, Guide d'Installation, Installatie gids

Hardware



x1


In-Wall



x4


#10 x 2" Screw

#10 x 50.8 mm Screw




x1

Snap In Socket



x1


Snap in Plug Plate



x1


Universal Power
Socket

1

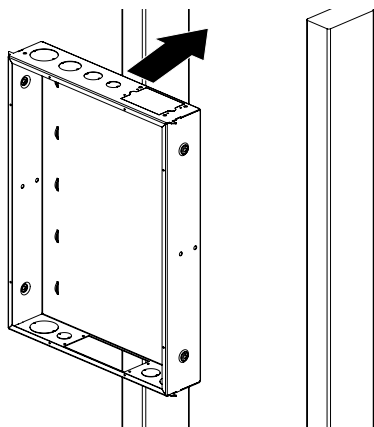


The GB-INWAVPL is design to mate inside between 16" (406.4mm) and larger width wood or sheet metal stud walls. The in-wall box can mated to both stud sides or one only depending on the clear space between the studs.

2

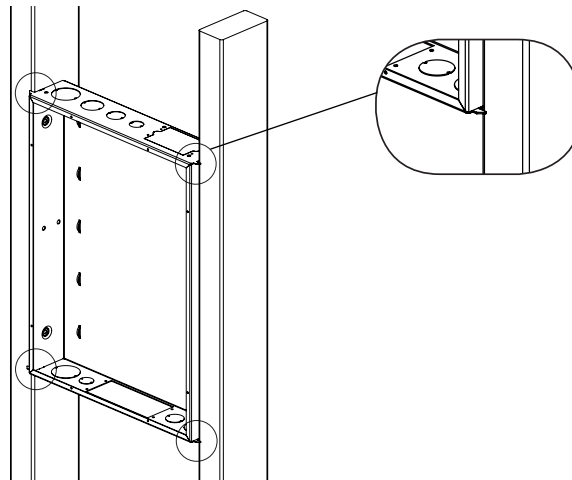


There are four (4) tabs on the in-wall box. The tabs act as install stop guide for wood or metal studs.

3

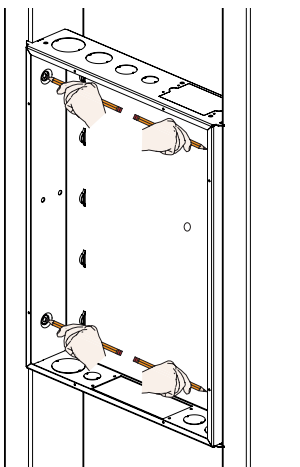

Find the desired location and mark the mounting locations.

4

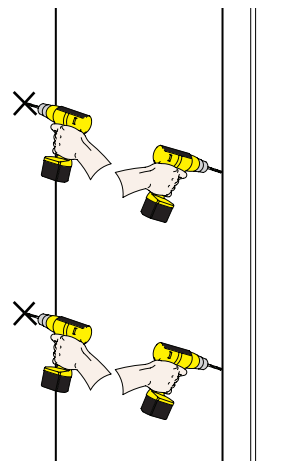

Drill a pilot hole using a 5/32" (3.7 mm) drill bit.




GB-INWAVPL

Installation Guide

Installationsanleitung, Guía de Instalacion, Guida de Installazione, Guide d'Installation, Installatie gids

3


(4) #10 X 2" (50.8 mm)
Screw

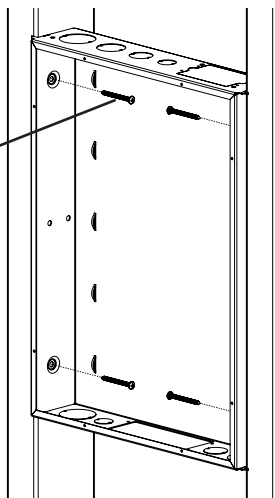

Power drill driver may require you to pilot drill at a slight angle due to the width on the in-wall box interior.

If you are mounting to only a single stud use two of each screw and follow the same basic procedure as above.


4A

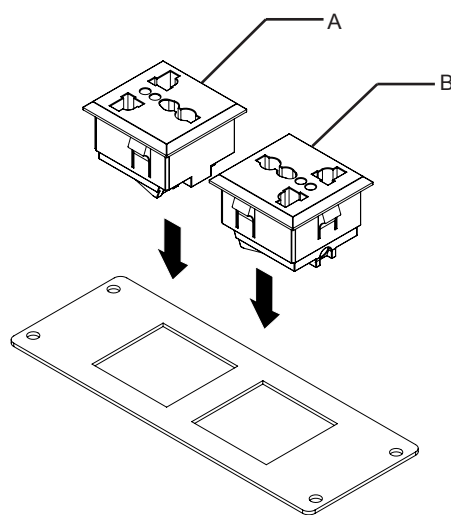


A. Media Player / Set top Box
B. Display

4B

110V

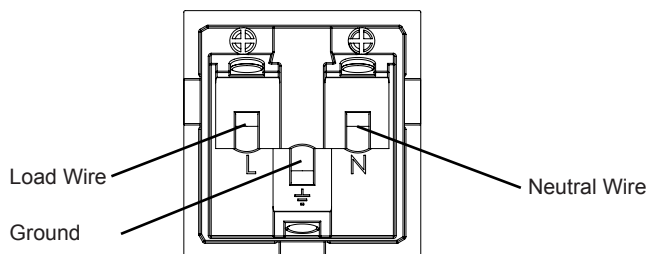


220V

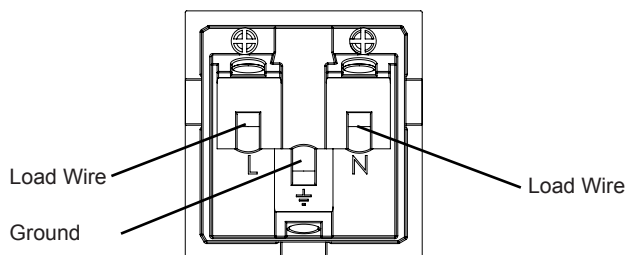

5

(4) M4 x 6mm
Screw

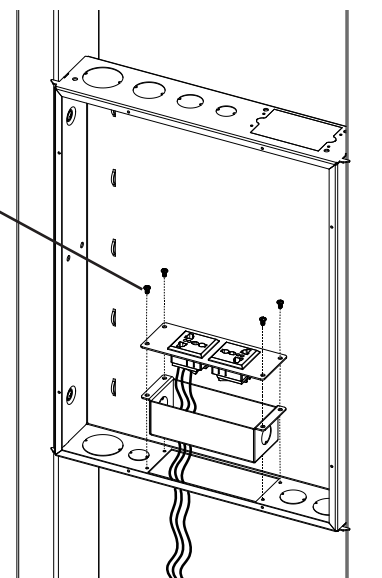

1. Put the wires up through J-Box.
2. Use a #2 Phillips screw driver to install four (4) M4 x 6mm Screw.

