

TRUCK HARNESS POWER PREP: FULL VEHICLE POWER DISTRIBUTION

Power Prep Harnesses provide battery hot, ignition, ground and in some configurations timed fused outputs


These products feature battery direct power and grounds to provide main power distribution for aftermarket equipment installations.

Power Prep Harnesses can be broken down into three basic groups:

- **Full Vehicle Power**: The output wires are either long enough to reach throughout the vehicle or are braided to pre-determined breakout locations throughout the vehicle
- **Power To the Center Console**: A main power feed and fuse panel at the battery with outputs circuits that reach to the center console
- **Power In the Center Console**: A main power feed from the battery to a console mounted fuse panel

Warranty Terms/Policy by AFS:

- · No warranty for Fuses and Solenoids
- 1 year limited warranty for Relays, Timers, Electronic Control Modules and Circuit Boards
- 3 year limited warranty for Wire Harnesses, Fuse Panels and Power Distribution Centers

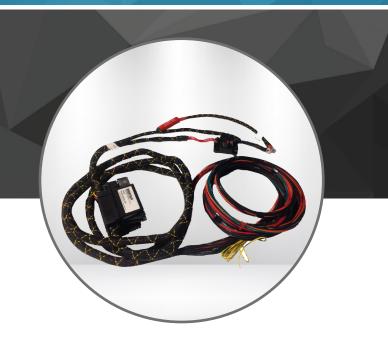

Features:

- Power Prep Series is designed to work with Commercial Trucks, Police Vehicles and SUV's
- Direct plug in of DR series timers eliminate the need for additional timers to be installed
- Flexible lines capable of reaching console and back of a crew cab or a trunk tray
- · Color-Coded and Labeled Wiring
- Detailed Color Schematics
- · Direct to Battery Grounds
- Fabricated Wire Harness of High Quality TXL Copper Exceeds SAE Standard J-1128
- Heat Rated: Tested for Maximum Loads at -40°F to 221°F
- · Fire Retardant Protective Loom
- · Circuits for Timed, Hot and Ignition power

ITEM NO.	DESCRIPTION	PLACEMENT	CIRCUITS TO CONSOLE	WEIGHT
7300-0043	Integrator Truck Harness, 11 Circuits to Console with DR40-VM Voltage Sensing Timer (TH45-VM)	Underhood Fuse Panel, 125A Master Fuse, Master Cutoff switch Power Distribution Center and Wires that extend to the console and 107" further toward rear of vehicle	3 - Hot lines (30A, 20A, 20A) 4 - Ignition lines (10A each) 4 - Timed Lines (10A each)	6.09 lbs.

